

Prepared for BISAT proceedings Carr, Martin, McKinney, Jordan, Neil and Williams
IOP, J. Phys. in Medicine and Biology 3/18/02 4:51
PM

Very high Power THz radiation at Jefferson Lab

G.L. Carr

National Synchrotron Light Source, Brookhaven National Laboratory, Upton, NY 1197

Michael C. Martin, Wayne R. McKinney

Advanced Light Source, Lawrence Berkeley National Laboratory, Berkeley, CA 94720

K. Jordan, George R. Neil and G.P. Williams

*Free Electron Laser Facility, Jefferson Lab, 12000 Jefferson Avenue, Newport News,
VA 23606*

Abstract

We report the production of high power (20 watts average, ~1 Megawatt peak) broadband THz light based on coherent emission from relativistic electrons. We describe the source, presenting theoretical calculations and their experimental verification. For clarity we compare this source with one based on ultrafast laser techniques, and in fact the radiation has qualities closely analogous to that produced by such sources, namely that it is spatially coherent, and comprises short duration pulses with transform-limited spectral content. In contrast to conventional THz radiation, however, the intensity is many orders of magnitude greater due to the relativistic enhancement.

Introduction

The THz source is located at the Free Electron Laser (FEL) facility at Jefferson Lab. This laboratory operates the first of a new generation of light sources based on a photo-injected Energy-Recovered, (superconducting) Linac (ERL)[1]. The present machine has a 48 MeV electron beam and an average current of 5 mA. The electrons are contained in bunches which are extremely short with full-width-half-maximum (FWHM) values that are in the few hundred femtosecond regime. These electron bunches pass a chicane around the optical cavity, and therefore emit synchrotron radiation. When the electron bunch length approaches that of the wavelength of the light being emitted, the entire bunch of up to 130 picocoulombs of charge (9×10^8 electrons), radiates coherently[2]. The result is a broadband spectrum whose average brightness is more than 5 orders of magnitude higher than can be obtained from

conventional incoherent synchrotron IR sources, which themselves have a brightness that is 3 orders of magnitude higher than a 2000K thermal source.

In order to understand the origin of the many orders of magnitude gain realized in these experiments, we make a comparison with a more conventional (non-relativistic) THz source, see Fig. 1. In both cases a short pulse from a mode-locked laser strikes a GaAs wafer, generating charge carriers. Thus the number of radiating charges is comparable. We can therefore compare the power produced per electron, and use Larmor's formula[3] for the radiated power. In CGS units it takes the form

$$Power = \frac{2e^2 a^2}{3c^3} \gamma^4 \quad (1)$$

where e is the charge, a is the acceleration, c the speed of light and γ is the ratio of the mass of the electron to its rest mass. In case A (the conventional THz emitter), these carriers immediately experience a force from the bias field (~ 100 volts across a 100 micron gap) of $\sim 10^6$ V/m, which results in an acceleration of 10^{17} m/s². The entire process is completed in less than 1 ps, resulting in spectral content up to a few THz. In case B, the same number of charge carriers are brought to a relativistic energy of > 10 MeV in a linac, after which a magnetic field bends their path into a circle of radius $\rho = 1$ m resulting in an acceleration $c^2/\rho = 10^{17}$ m/sec², the same as for case A. An observer for case B also detects a brief pulse of electromagnetic radiation as an electron bunch passes by. But in this case, two factors control the pulse duration; one is the bunch length and the other is the time for the relativistically compressed acceleration field from each electron to sweep past. The latter is given approximately by[3]

$$\delta t = \frac{4 \rho}{3 \gamma^3 c} \quad (2)$$

and determines the spectral range emitted by each electron. The bunch length determines the spectral range over which the coherent enhancement occurs. For an electron energy of 10 MeV ($\gamma = 21$), and with $\rho = 1$ m, we obtain a δt of about 500 fs, which is comparable to the bunch length itself. The resulting spectral content extends up to about 1 THz, the same spectral range as for case A. Thus, assuming the same number of electrons, which is true within an order of magnitude, the ratio of the power radiated by the present generation to the conventional THz generation is given by $\gamma^4 = 2 \times 10^5$.

Calculations and Results

Details of the theory have been presented elsewhere[4], and further details will be presented in an upcoming paper, but in Fig. 2 we present calculations of the total power emitted by a 500 fsec fwhm electron bunch in units of (average) watts/cm⁻¹ over the range 1-10,000 cm⁻¹, or 1 centimeter to 1 micrometer. In the same figure we compare a 2000K thermal source, and a synchrotron radiation source, namely the National Synchrotron Light Source U4IR facility[5] at Brookhaven National Laboratory. The superiority of the JLab ERL and the onset of the coherent emission are evident. In Fig. 3, we present the results of our measurements and a comparison with the calculation of Fig. 2. The spectral content of the emitted THz light was analyzed using a Nicolet 670 rapid-scan Michelson interferometer with a silicon beamsplitter. The light was detected using a 4.2K Infrared Laboratories bolometer with a 2 mm \times 2 mm boron-doped Si

composite element, fed from a 12 mm diameter $f/4$ Winston cone. It was fitted with a black polyethylene filter to ensure no light above 600 cm^{-1} was detected. Our collection angle was 60×60 milliradians and the extraction window was quartz. We were able to determine the absolute power in 2 ways, one using a calibrated pyroelectric detector, and one by comparing our spectra with that from a 1300K thermal source, by operating the ERL at a lower repetition rate to enable the large dynamic range to be covered. The data has been scaled on the basis of these absolute power measurements.

The spectral onset of the super-radiant enhancement on the high frequency side, is clearly seen, and the onset shape is also seen to match closely the theoretical predictions. Note that there is a severe discrepancy on the lower frequency side due to diffraction effects. This can be understood in the following way. At 10 cm^{-1} and with an $f/17$ beam, the diffraction-limited source size is 17 mm, almost the same as the extraction optics. At 1 cm^{-1} , the diffraction-limited source size would, at 170 mm, be more than 3 times larger than the vacuum chamber containing the electron beam!

Conclusions

We have shown that the short bunches in the new generation of sub picosecond energy recovery systems yield broadband high brightness far-IR radiation with about $\frac{1}{2}$ watt/ cm^{-1} of average power into the diffraction limit. This power is delivered in 500 fsec fwhm pulses every 13.3 nanoseconds, so that the peak power is $\sim 2 \times 10^4$ higher than this. Further, we note that the brightness of the ERL source, which is defined as the flux per unit source area per unit solid opening angle is determined by dividing the

PM

power by λ^2 , since the electron bunch has lateral dimensions that are smaller than the wavelength, and full spatial coherence exists.

Finally we note that the JLab ERL is the first of a new generation of such machines, and in the future it is expected that higher energies and currents will be available, making such sources stronger by many more orders of magnitude. A dedicated THz source based on the principles discussed here may also be made much smaller than the JLab ERL facility.

Acknowledgements

We deeply appreciate the excellent support of our colleagues at each institution without which these experiments would not have been possible. At Jefferson Laboratory, we particularly thank Steve Benson, Fred Dylla, Joe Gubeli, and Michelle Shinn. This work was supported primarily by the U.S. Dept. of Energy under contracts DE-AC02-98CH10886 (Brookhaven National Laboratory), DE-AC03-76SF00098 (Lawrence Berkeley National Laboratory) and DE-AC05-84-ER40150 (Thomas Jefferson National Accelerator Facility). The JLab FEL is supported by the Office of Naval Research, the Air Force Research Laboratory, the Commonwealth of Virginia and the Laser Processing Consortium.

References


1. G.R. Neil, C.L. Bohn, S.V. Benson, G. Biallas, D. Douglas, H.F. Dylla, R. Evans, J. Fugitt, A. Grippo, J. Gubeli, R. Hill, K. Jordan, G. Krafft, R. Li, L. Merminga, P. Piot, J. Preble, M. Shinn, T. Siggins, R. Walker and B. Yunn, "Sustained kilowatt lasing in a free-electron laser with same cell energy recovery" *Physical Review Letters* **84**, 662 (2000).
2. C. J. Hirschmugl, M. Sagurton and G. P. Williams, "Multiparticle coherence calculations for synchrotron radiation emission" *Physical Review* **A44**, 1316 (1991).
3. J.D. Jackson, *Classical Electrodynamics*, Wiley, New York 1975
4. G.P. Williams, "Far-IR/THz radiation from the Jefferson Lab energy recovered linac, free electron laser" *Rev. Sci. Instr.* **73** 1461 (2002).
5. G.P. Williams, "The initial scientific program at the NSLS infrared beamline" *Nucl. Instr. & Meth.* **A291**, 8 (1990).

Figure Captions

Fig. 1. Cartoon showing the comparison between a conventional ultrafast laser driven THz source (A) and the high power source presented here (B).


Fig. 2. Calculated average THz power from 3 broadband sources. The blackbody is at 2000K, the NSLS source is described in reference 5.

Fig. 3. Measured and calculated THz average power at the Jefferson Lab ERL facility.

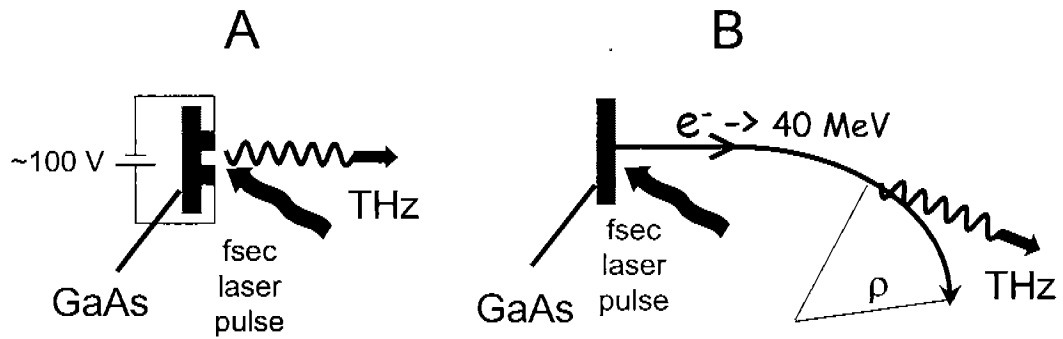


Carr, Martin, McKinney, Jordan, Neil and Williams

Fig. 1

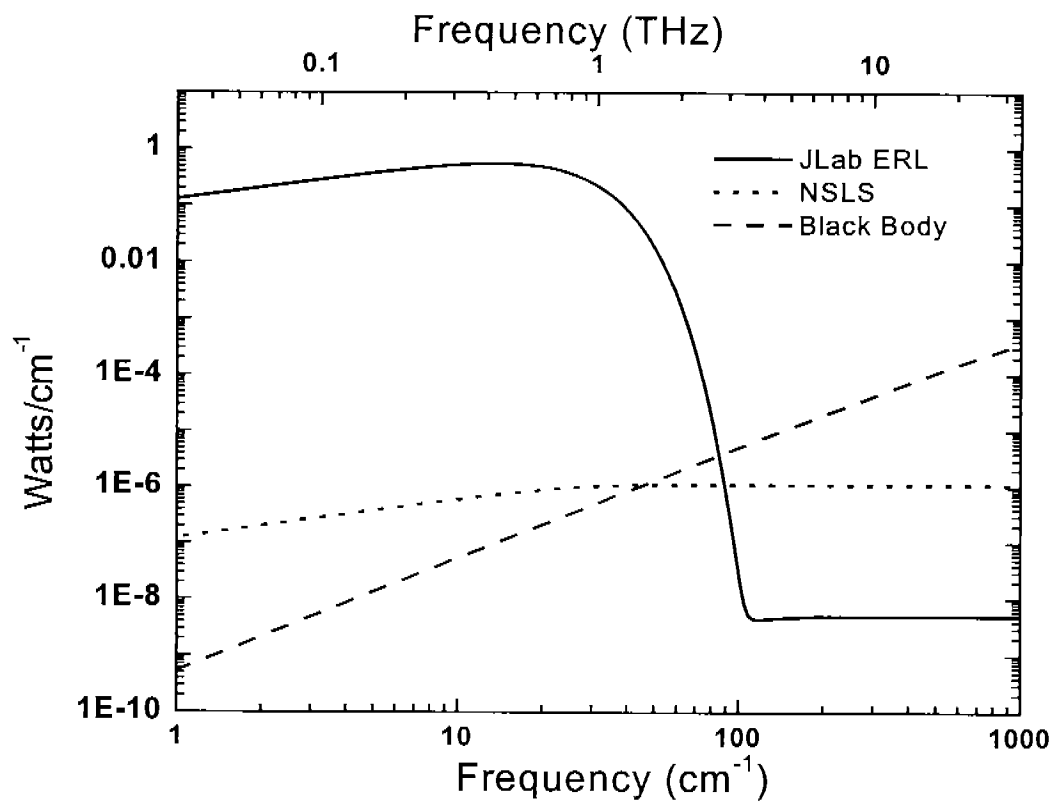

Carr, Martin, McKinney, Jordan, Neil and Williams

Fig. 2

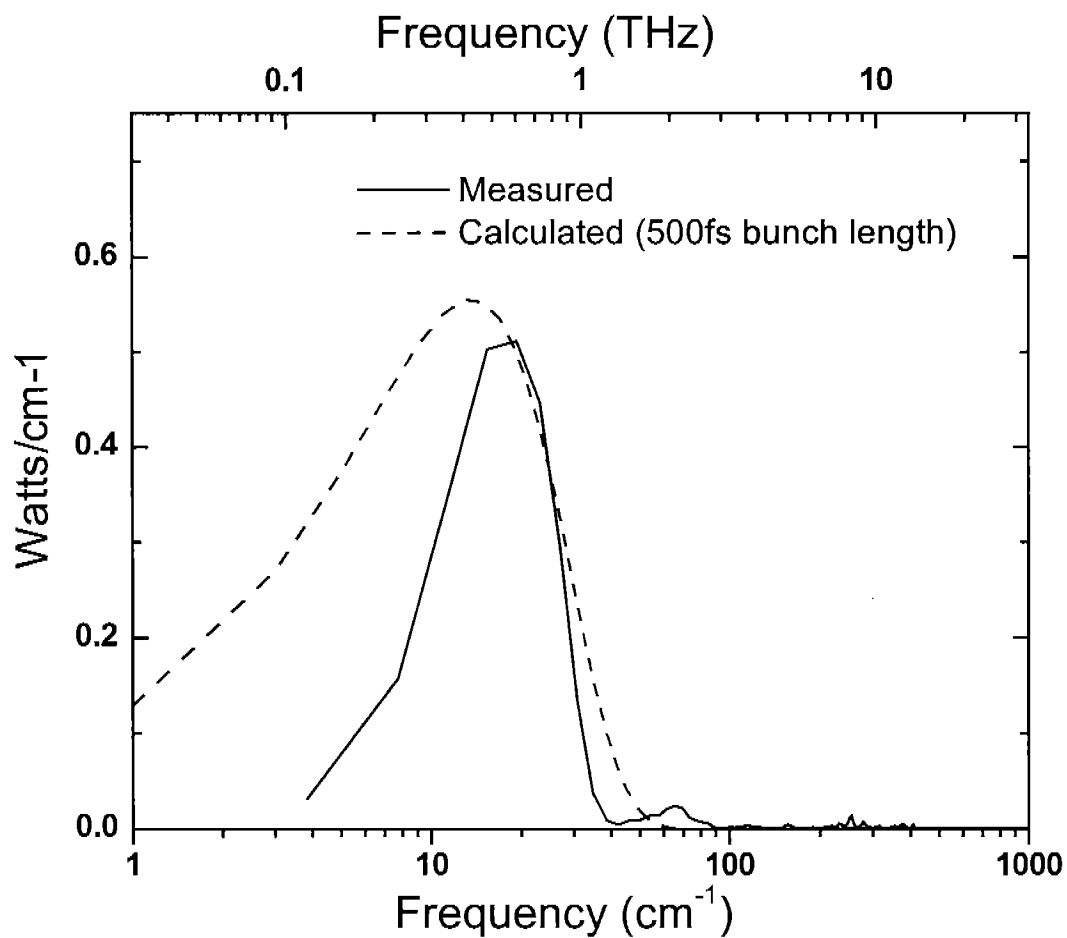

Carr, Martin, McKinney, Jordan, Neil and Williams

Fig. 3