




U.S. DEPARTMENT OF
ENERGY





EIC Beamline R & D Status

Detector Support Group
November 16, 2022

November 16, 2022

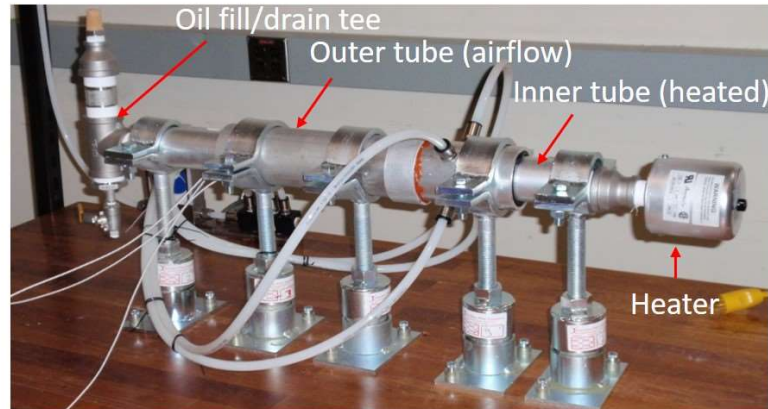

Beryllium pipe mock-up assembled with four ½" gas lines

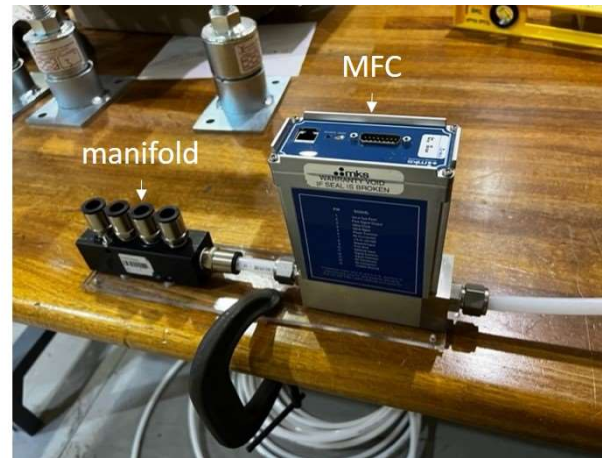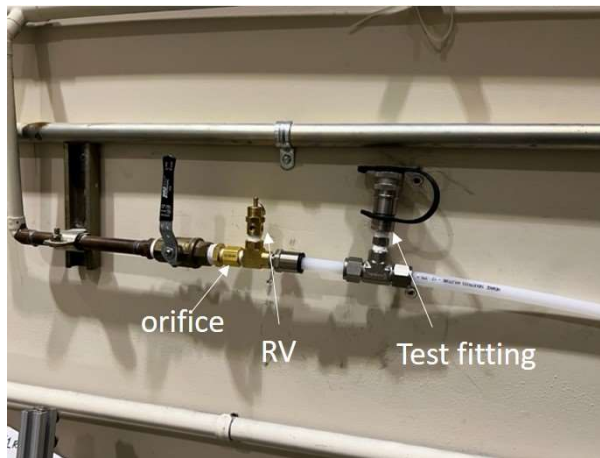

EIC

Pablo Campero, Brian Eng, George Jacobs, Marc McMullen

- Installed with epoxy four, ½" gas line adapters into 3.5" pipe
- Received orifice and relief valve from the design authority and procured fittings to install these items to the pressure system gas line