


REV.	DATE	DESCRIPTION	BY	APP'D
1	6-89	CHANGED SET SCREW HOLE, ADDED ACTUATOR HOLES, CORRECTED DIMENSIONS	WAALER	

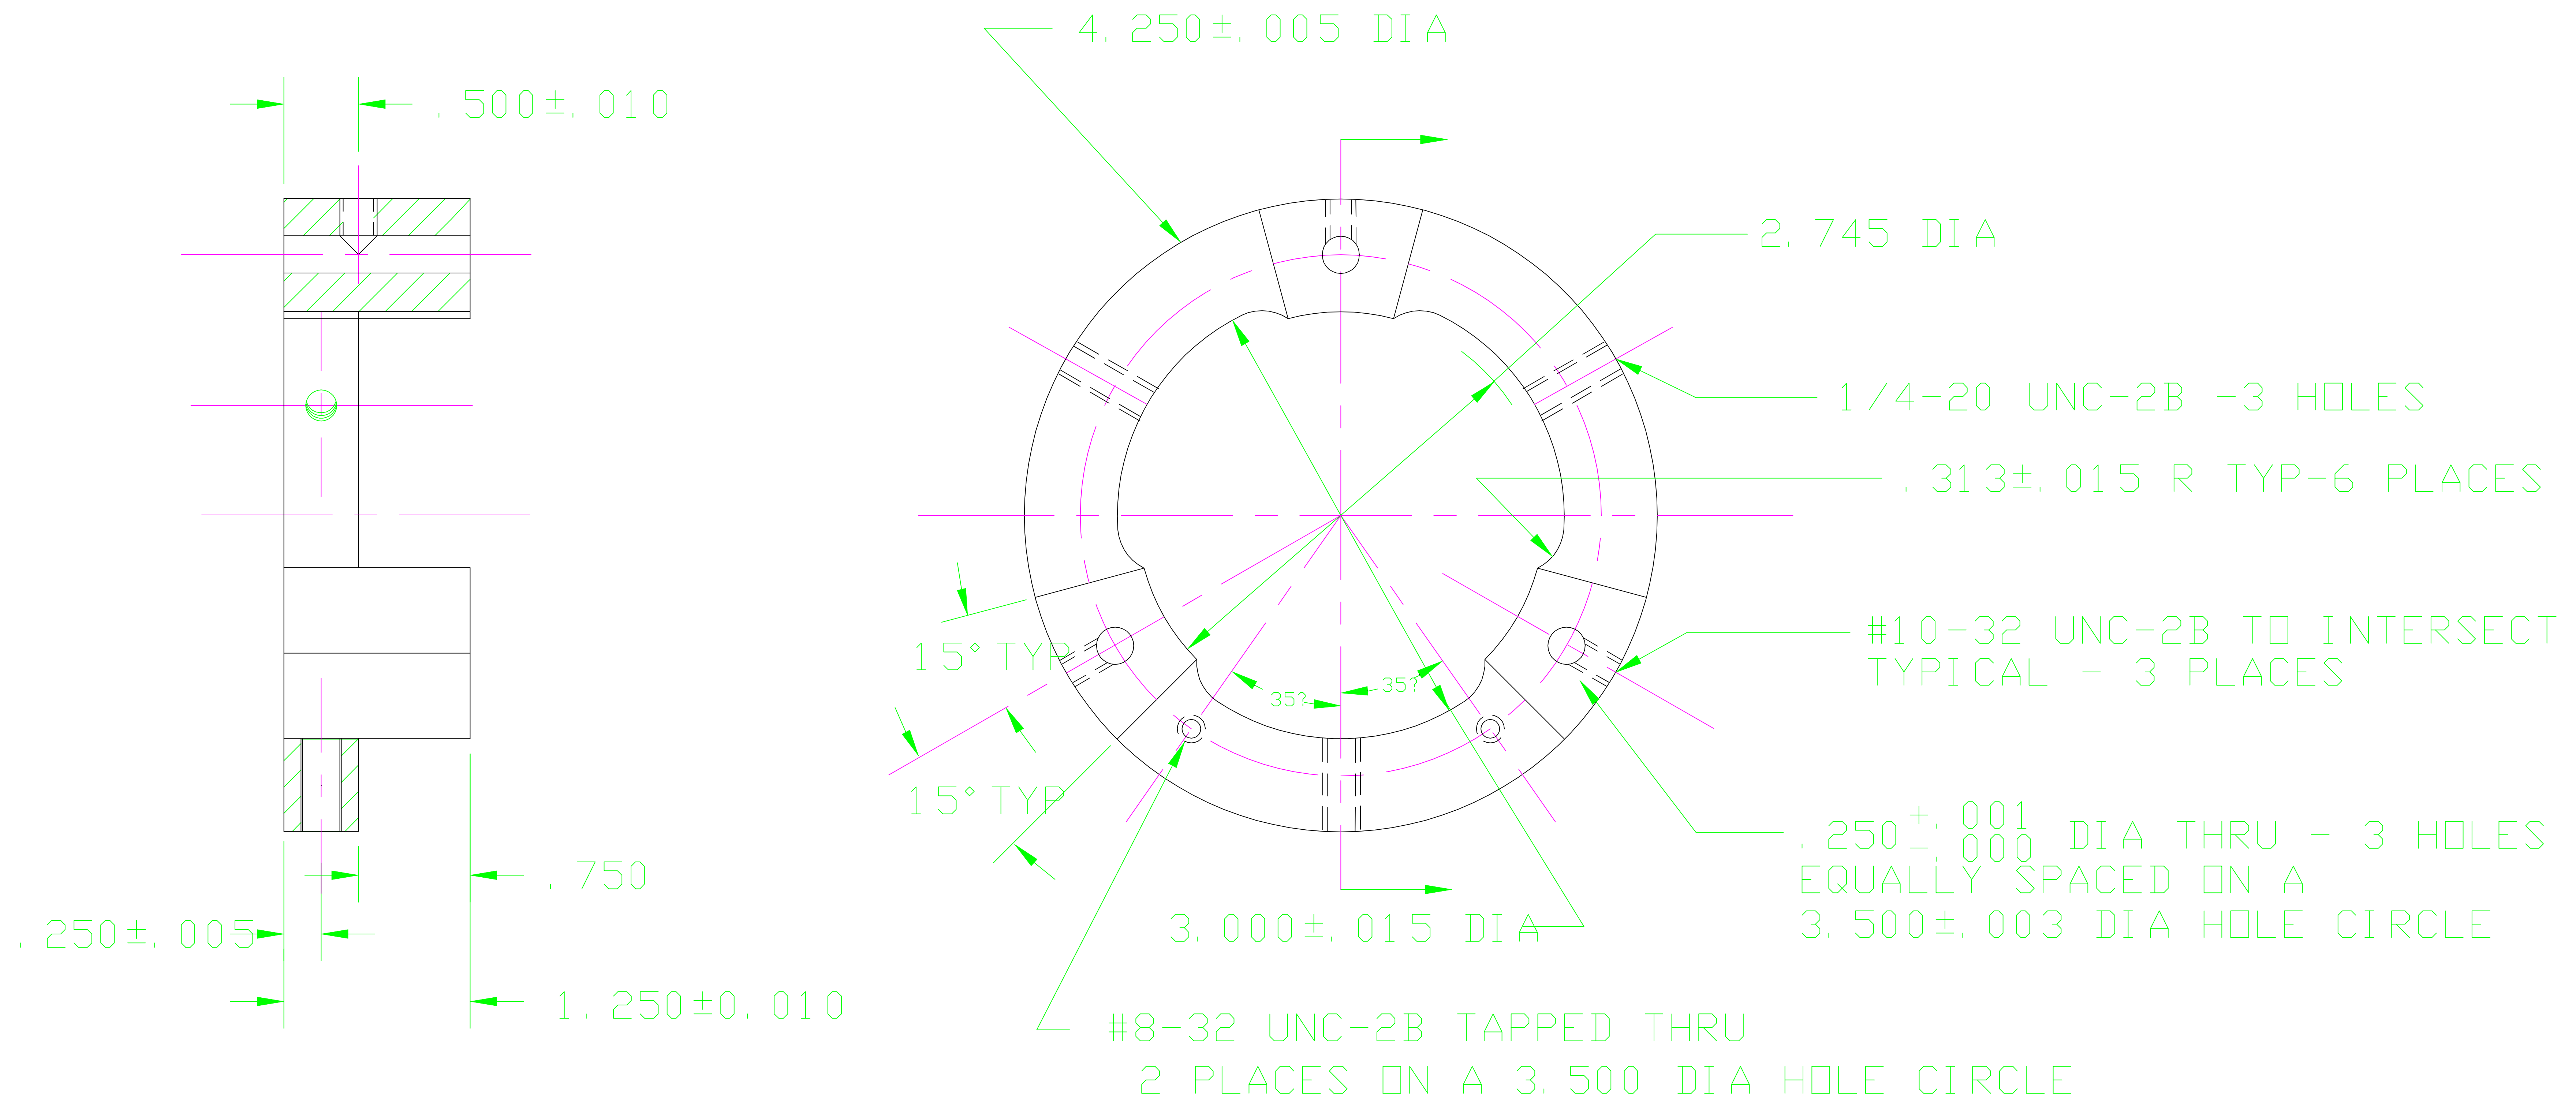

- NOTES
1. MATERIAL: 6061 ALUMINUM
 2. LUBRICATE SET SCREWS WITH BAKED-ON COATING OF MoS_2

SLAC: PF795-649-25-R0 MODIFIED

DRAWN BY SPESE	NUCLEAR PHYSICS LABORATORY UNIVERSITY OF ILLINOIS AT URBANA-CHAMPAIGN	GUIDE ROD MOUNT		
CHECKED BY	UNLESS OTHERWISE SPECIFIED	PART NO.	SCALE 1=1	FILE 12
APPROVED BY	DIMENSIONS IN INCHES 2 PLACE DEC. $\pm .01$ BREAK SHARP CORNERS 3 PLACES DEC. $\pm .003$ FRACTIONAL $\pm 1/32'$ ANGULAR $\pm 0'30'$	NO. REQ'D.	DATE 7-10-88	DWG. NO. C-2709-16
		CHASSIS NO. OR MATERIAL LISTED		