
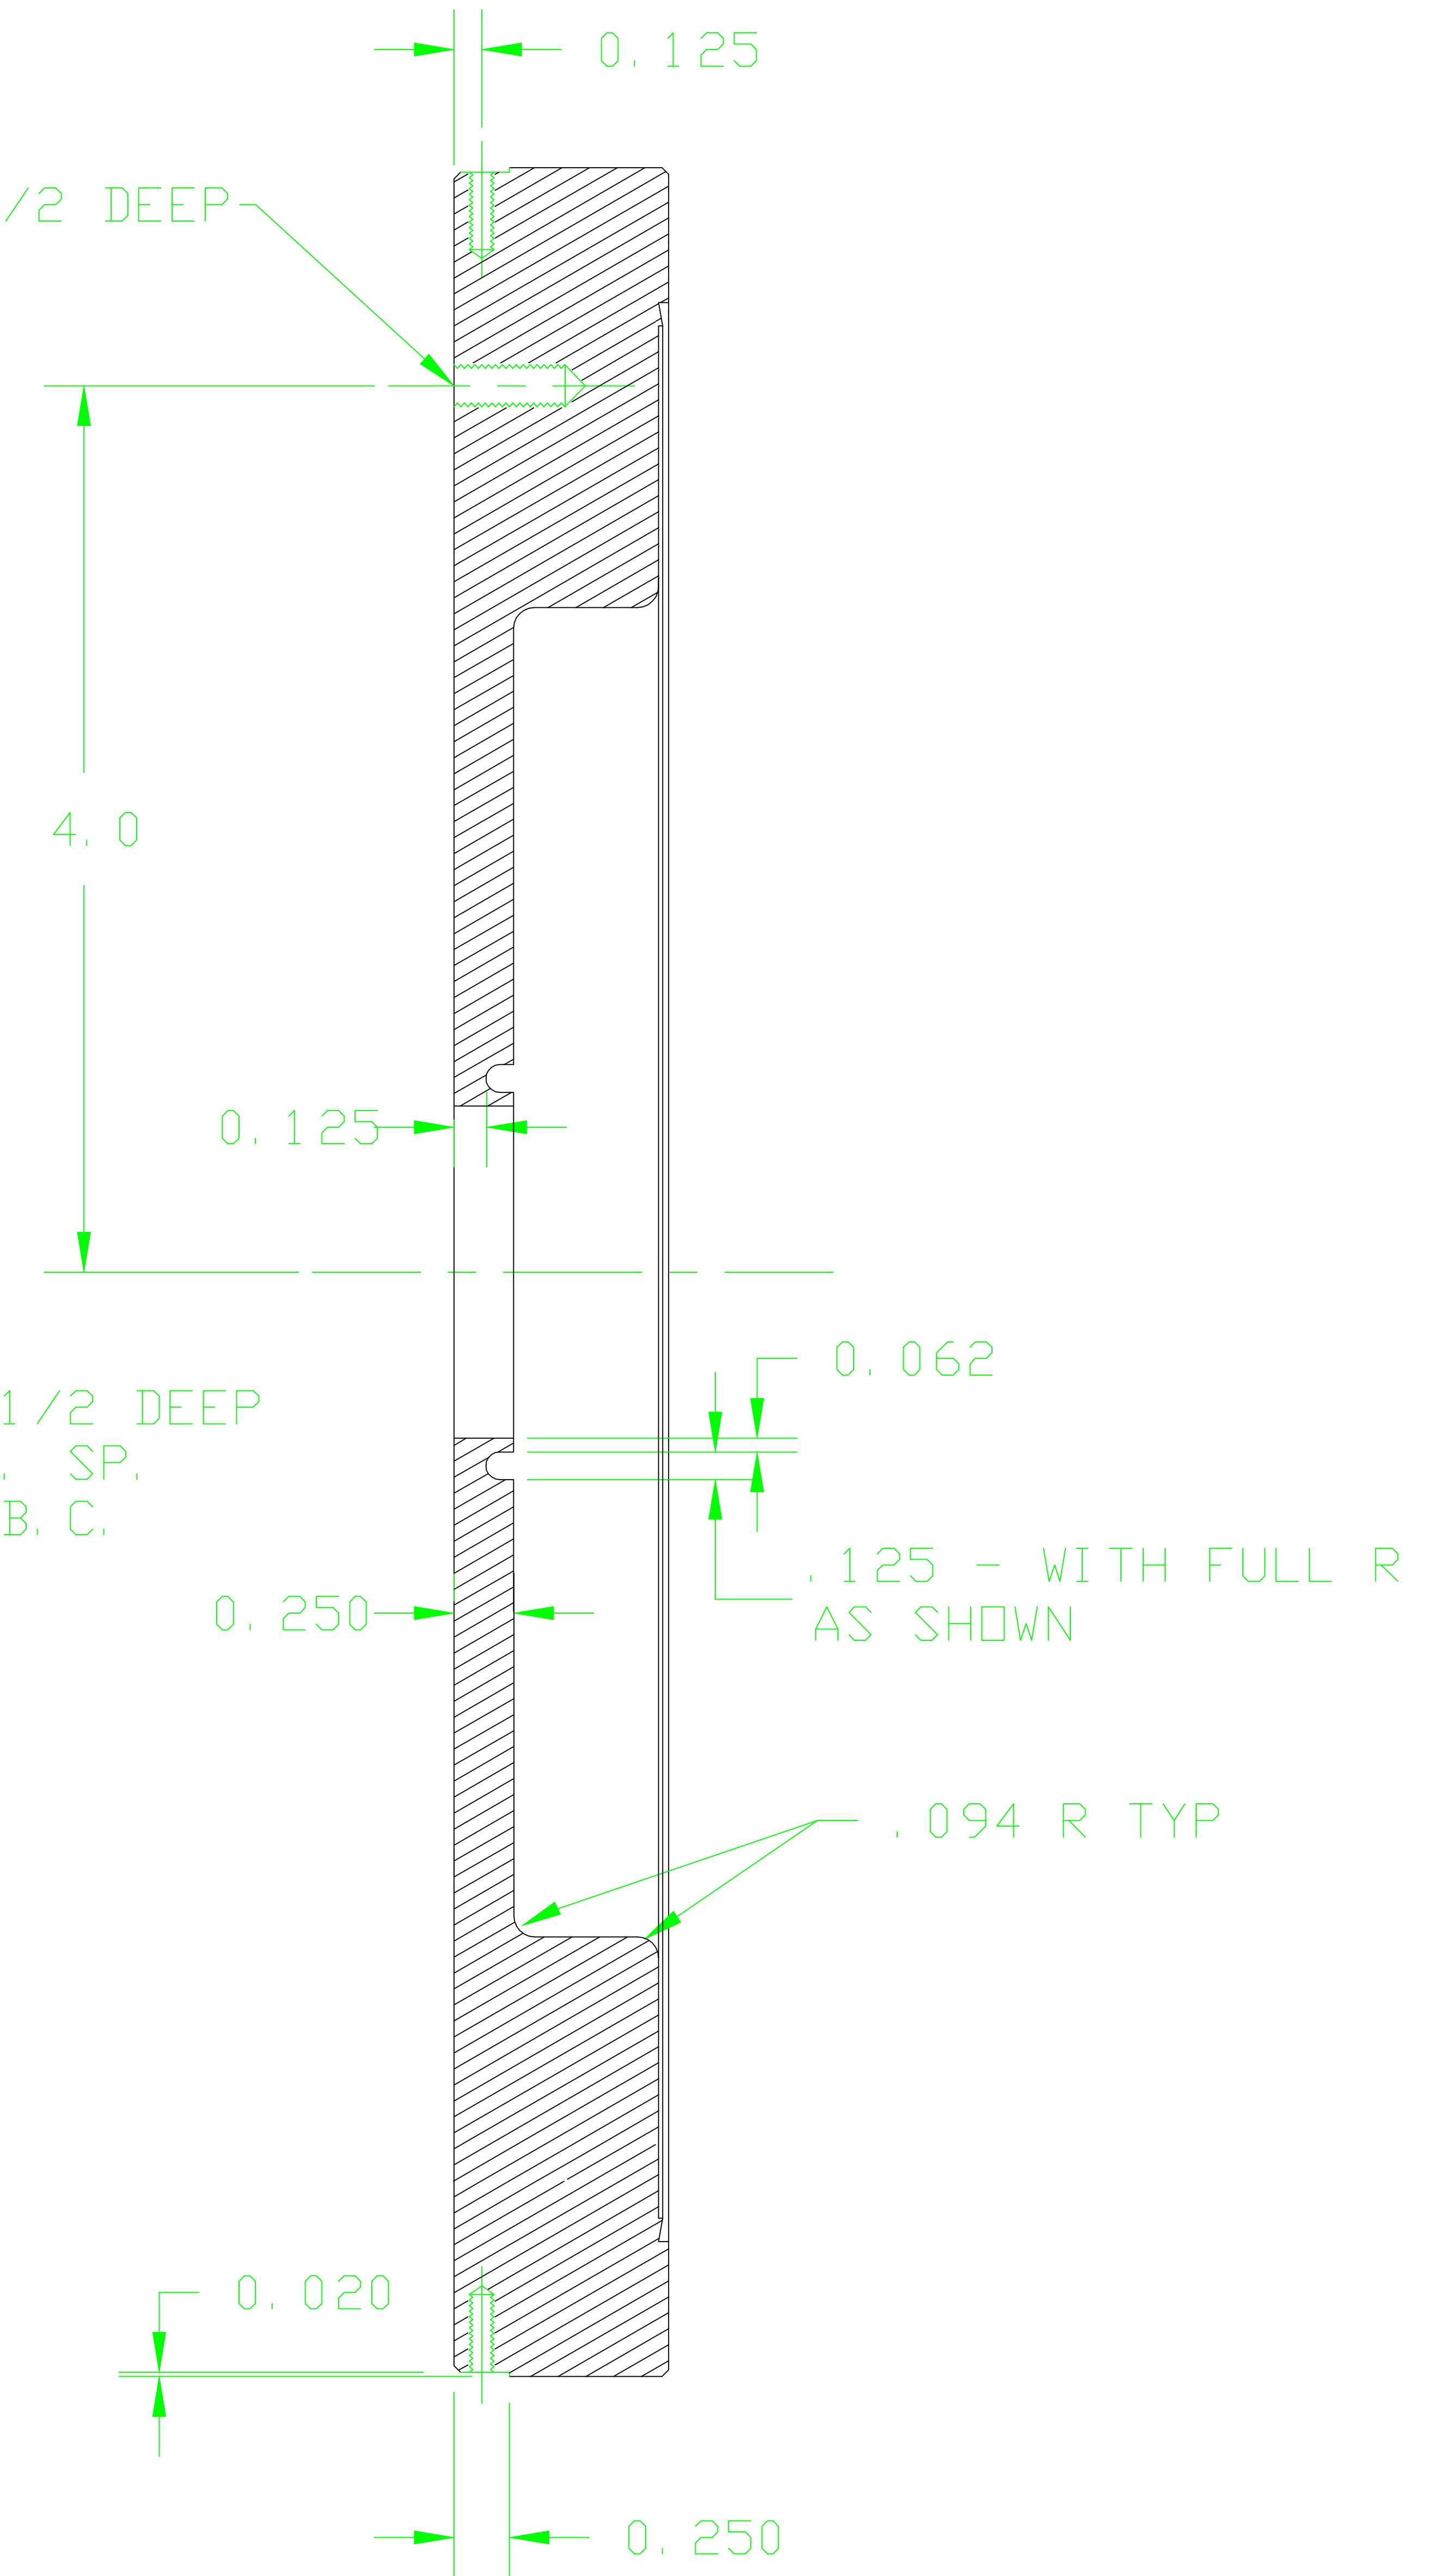


| REV. | DATE | DESCRIPTION | BY | APP'D |
|------|-------|----------------------------|----|-------|
| 1 | 10-25 | ADDED #8-32 HOLES FOR TC'S | | |

ALIGN LEAK GROOVE WITH THESE TWO TAPPED HOLES

#4-40 UNC-3/8 DEEP
12 PLACES

#10-32 UNC 1/2 DEEP
ONE HOLE

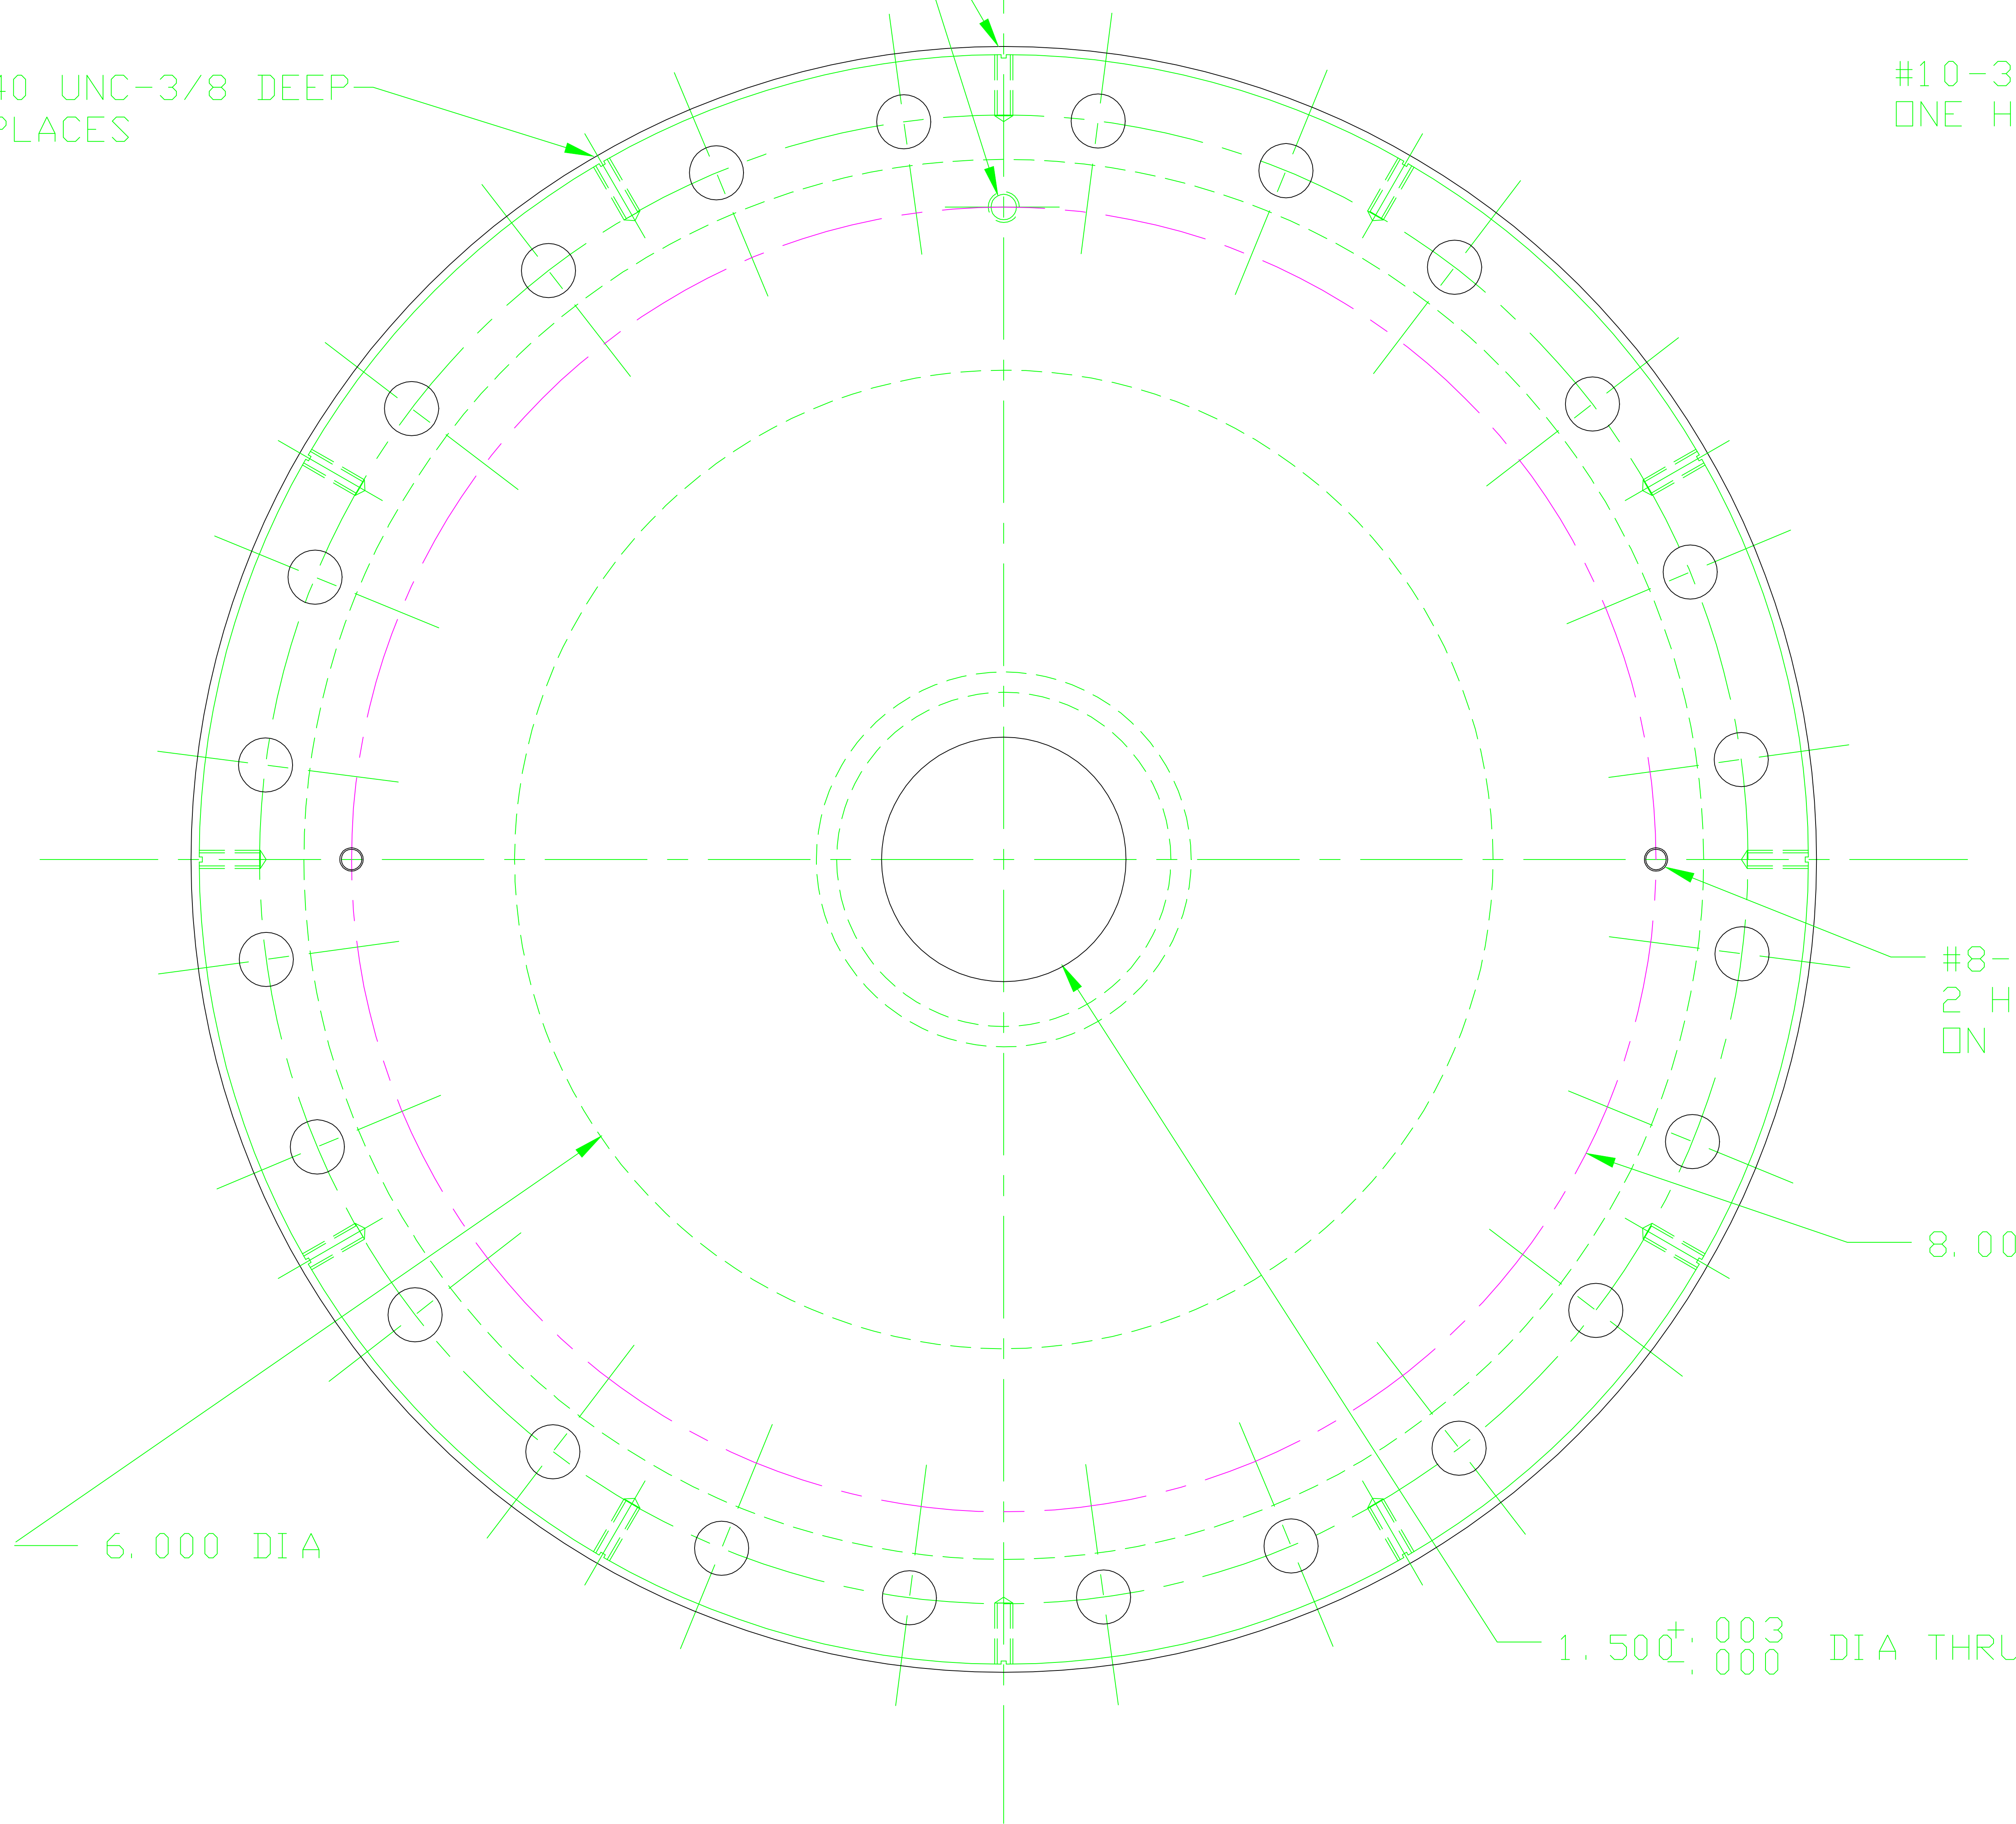

NOTES:

1. MAKE FROM MDC CONFLAT FLANGE PART F1000000 OR APPROVED EQUIVALENT
2. ALL MACHINING TO BE DONE WITH SULFUR-FREE CUTTING OIL.

SLAC: PF795-649-42-R1 MODIFIED

| | | | | |
|-------------------|--|--------------------------------|-------------------------|-----------------------|
| DRAWN BY SPESE | NUCLEAR PHYSICS LABORATORY UNIVERSITY OF ILLINOIS AT URBANA-CHAMPAIGN | | EMITTER MOUNTING FLANGE | |
| | UNLESS OTHERWISE SPECIFIED | | PART NO. | SCALE |
| CHECKED BY | DIMENSIONS IN INCHES 2 PLACE DEC. ± .01 | NO. REQ'D. | 1=1 | FILE |
| APPROVED BY | BREAK SHARP CORNERS 3 PLACES DEC. ± .003 | CHASSIS NO. OR MATERIAL LISTED | DATE | 12 |
| | FRACTIONAL ± 1/32" ANGULAR ± 0° 30' | | 7-10-88 | DWG. NO. C-2709-26 |