


REV.	DATE	DESCRIPTION	BY	APP'D
1	10/88	ADDED BOLT SET 10 AND GASKET 11 AND NOTE 4; CHANGED 9 TO SET SCREW	URI BE	

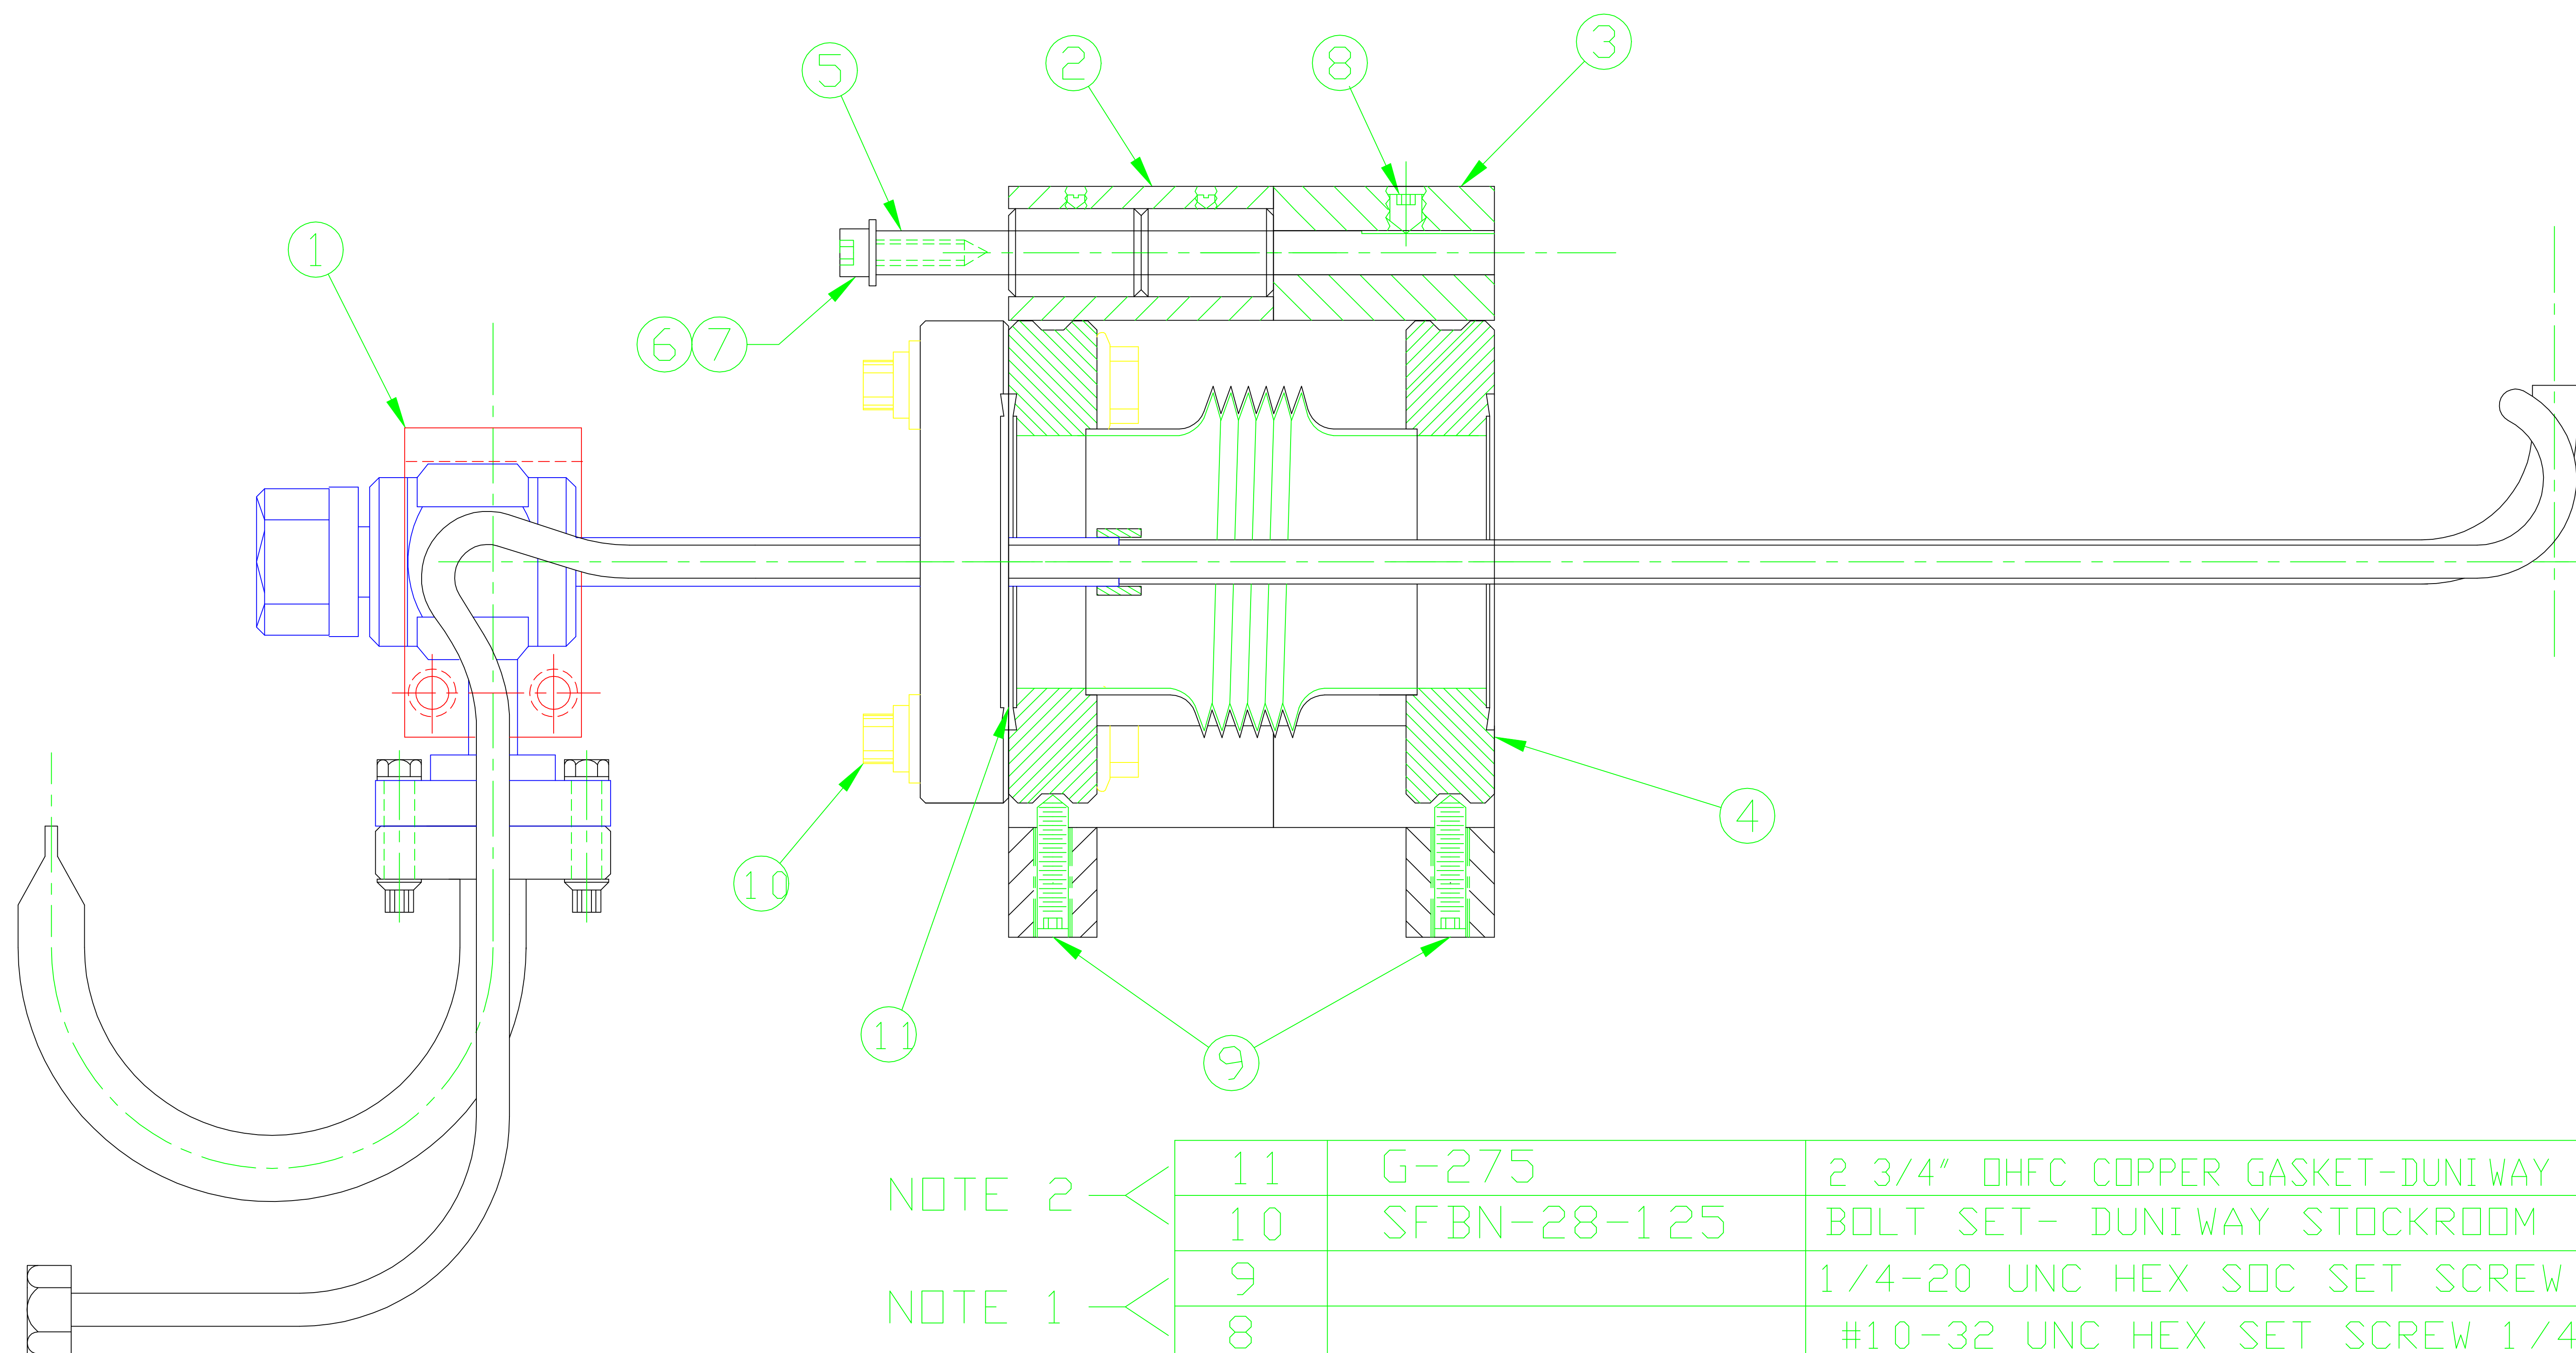

NOTE 2	11	G-275	2 3/4" DHFC COPPER GASKET-DUNIWAY STOCKROOM	
	10	SFBN-28-125	BOLT SET- DUNIWAY STOCKROOM	
NOTE 1	9		1/4-20 UNC HEX SOC SET SCREW 3/4" LG	6
	8		#10-32 UNC HEX SET SCREW 1/4" LG	3
NOTE 2	7		#8-32 UNC SOC-HD CPSCR-1/2" LG	3
	6		WASHER-FLAT STEEL #8	3
NOTE 4	5	C-2709-24	GUIDE ROD	3
	4	C-2709-7	BELLOWS ASSEMBLY	1
	3	C-2709-16	GUIDE ROD MOUNT	1
	2	C-2709-6	BUSHING MOUNT	1
	1	C-2709-1	CESIATOR ASSEMBLY	1
	ITEM	PART NO.	DESCRIPTION	QTY.

NOTES:

1. LUBRICATE WITH BAKED-ON COATING OF MoS
2. SILVER PLATE CAPSCREWS, WASHERS, AND GASKET .0002 THK
3. J-TUBE SHOWN AFTER SECOND PINCH-OFF (TO BE DONE AFTER INSTALLATION)
4. SUBSTITUTE C-2709-53 GUIDE RODS DURING BAKEOUT

DRAWN BY	NUCLEAR PHYSICS LABORATORY	CESIATOR ASSEMBLY		
SPESE	UNIVERSITY OF ILLINOIS AT URBANA-CHAMPAIGN			
CHECKED BY	UNLESS OTHERWISE SPECIFIED	PART NO.	SCALE	FILE
	DIMENSIONS IN INCHES 2 PLACE DEC. ± .01	NO. REQ'D.	1=1	12
	BREAK SHARP CORNERS 3 PLACES DEC. ± .003	CHASSIS NO. OR MATERIAL	DATE	DWG. NO.
	FRACTIONAL ± 1/32" ANGULAR ± 0° 30'	LISTED	7-11-88	D-2709-38A