


REV.	DATE	DESCRIPTION	BY	APP'D
1	6-89	CHANGED SET SCREW HOLE, ADDED ACTUATOR HOLES, CORRECTED DIMENSIONS	WAALER	
2	7-89	SHOWED TAPPED HOLES AS HIDDEN LINES	WAALER	

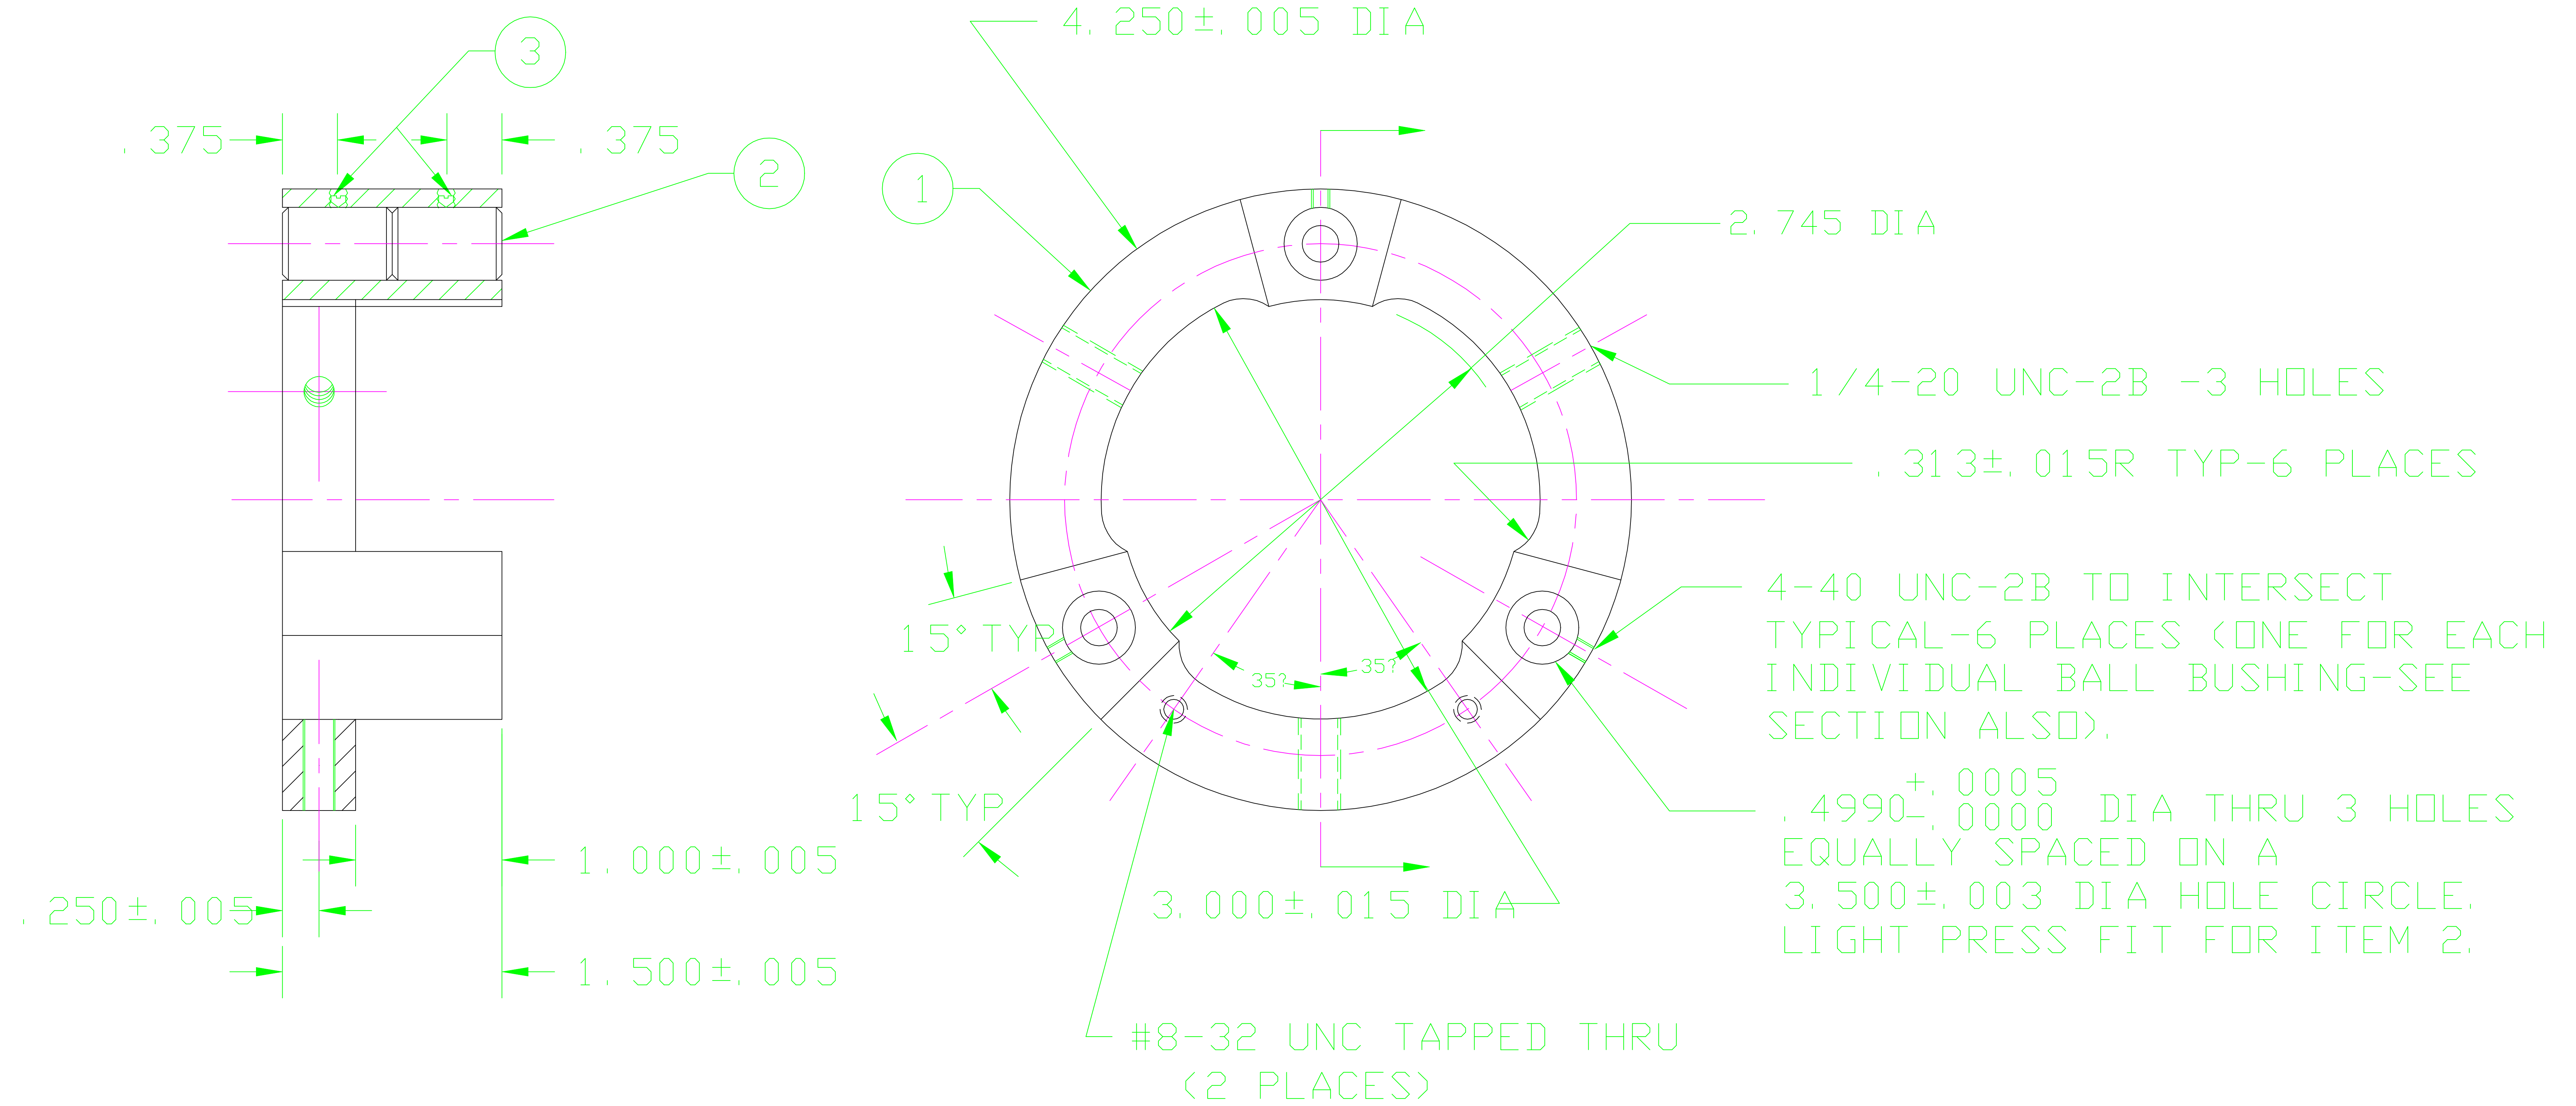

NOTES

- ALL ANGULAR ORIENTATION MUST BE AS SHOWN AND:
 - A: FEATURES EQUALLY SPACED WITHIN .003
 - B: GROUPS OF FEATURES RELATIVE TO EACH OTHER WITHIN .062
- LUBRICATE SET SCREWS WITH BAKED-ON COATING OF MoS₂

SLAC: SA795-649-26

3	#4-40	STAINLESS SET SCREW 1/8" LONG	6
2	#A-4812 SS	THOMSON BALL BUSHING	6
1		6061 ALUMINUM	1
ITEM	PART NO.	DESCRIPTION	QTY.
DRAWN BY SPESE		NUCLEAR PHYSICS LABORATORY UNIVERSITY OF ILLINOIS AT URBANA-CHAMPAIGN	
CHECKED BY		BUSHING MOUNT	
APPROVED BY		UNLESS OTHERWISE SPECIFIED	
		DIMENSIONS IN INCHES 2 PLACE DEC. ± .01	PART NO.
		BREAK SHARP CORNERS 3 PLACES DEC. ± .003	NO. REQ'D.
		FRACTIONAL ± 1/32"	ANGULAR ± 0° 30'
		CHASSIS NO. OR MATERIAL LISTED	SCALE 1=1
		DATE 7-10-88	FILE 12
			DWG. NO. C-2709-6