

E12-07-108 (GMp)
**Precision Measurement of the Proton Elastic
Cross Section at High Q^2**

Thir Gautam
Hampton University

On behalf of the GMp Collaboration

Hall A Collaboration Meeting
January 18, 2017

GMP collaboration

- Hall A collaboration, physics staff, technical staff, accelerator team and shift taker
- Spokesperson: J. Arrington, E. Christy, S. Gilad, V. Sulkosky, B. Wojtsekhowski (contact)
- Postdoc: Kalyan Allada (MIT)
- Graduate students: Thir Gautam (Hampton U.), Longwu Ou (MIT), Barak Schmookler (MIT), Yang Wang (W&M)

Preview

- Highlights:
 - Better than 2% statistics
 - High Q^2 (up to 16 GeV/c²)
 - Relatively low ϵ : the contributions from G_E^p is smaller than those for the large ϵ SLAC data
 - Multiple kinematic settings over the range of Q^2
- Calibration of detectors is nearly complete
- First pass analysis is in progress
- We project data analysis to be completed in a year

Outline

- Physics and experimental goals of GMp
- Hall A beamline, spectrometer and detectors
- Statistics collected
- Calibration and data analysis status
- Preliminary cross-section results
- Status and timeline to complete

Proton magnetic form factor

- Form factors encode electric and magnetic structure of the target

→ At low Q^2 , form factors characterize the spatial distribution of electric charge and magnetization current in the nucleon


$$|\text{Form Factor}|^2 = \frac{\sigma(\text{Structured object})}{\sigma(\text{Point like object})}$$

$$\mathcal{J}_{\text{proton}} = e\bar{N}(p') \left[\gamma^\mu F_1(Q^2) + \frac{i\sigma^{\mu\nu} q_\nu}{2M} F_2(Q^2) \right] N(p)$$

$$G_E = F_1 - \tau F_2 \quad G_M = F_1 + F_2$$

- In one photon exchange approximation the cross-section in ep scattering when written in terms of G_M^p and G_E^p takes the following form:

$$\frac{d\sigma}{d\Omega} = \sigma_{Mott} \frac{\epsilon (G_E^p)^2 + \tau (G_M^p)^2}{\epsilon(1 + \tau)}, \quad \sigma_{Mott} = \frac{\alpha^2 \cos^2 \frac{\theta}{2}}{4 E^2 \sin^4 \frac{\theta}{2}} \frac{E'}{E}$$

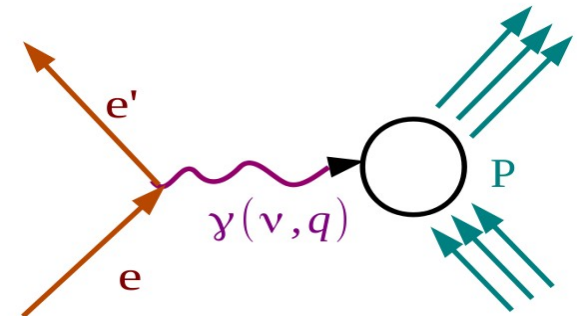

Where,

$$\tau = \frac{Q^2}{4M^2}, \quad \epsilon = \left[1 + 2(1 + \tau) \tan^2 \left(\frac{\theta}{2} \right) \right]^{-1}$$

Goals of GMP experiment as approved

- Precision measurement of the elastic ep cross-section in the Q^2 range of 7-14 GeV^2 and extraction of proton magnetic form factors
 - To improve the precision of prior measurement at high Q^2
 - To provide insight into scaling behavior of the form factors at high Q^2

Statistical: Better than 2%

Systematic:


Point to point: 0.8-1.1%

Normalization: 1.0-1.3%

Total Error Budget: 1.2 -2.6%


Need a good control on:

- Beam charge
- Beam position
- Scattering angle, target density, ...

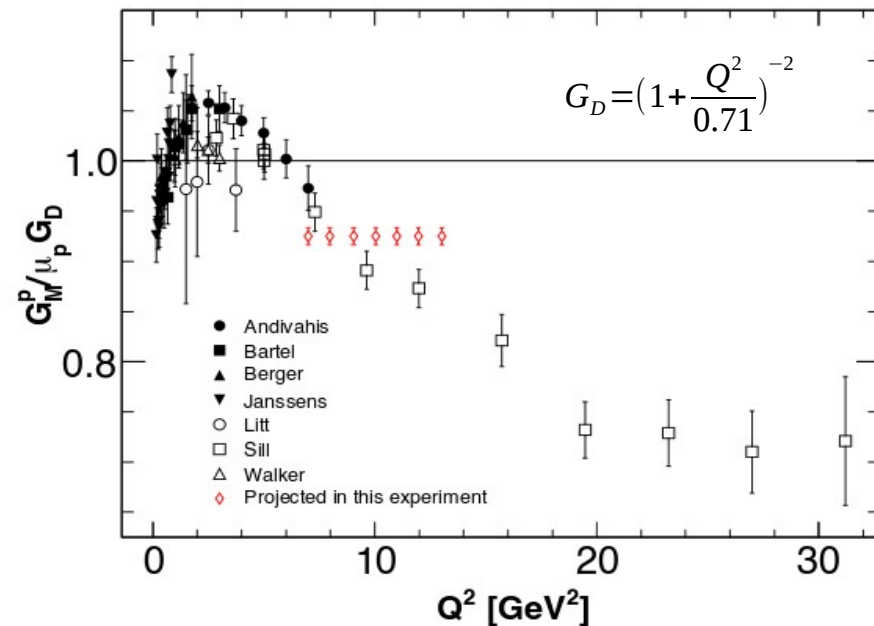

Hall A beamline, spectrometer and detectors


- RHRS SOS Quad is replaced by new quad
- The SOS Quad is installed in LHRS
- VDC is used for tracking information
- Straw Chamber(SC) is used to reduce systematic on VDC tracking efficiency
- Cherenkov and calorimeter are used for particle identification
- S0, S2m are used for trigger and timing

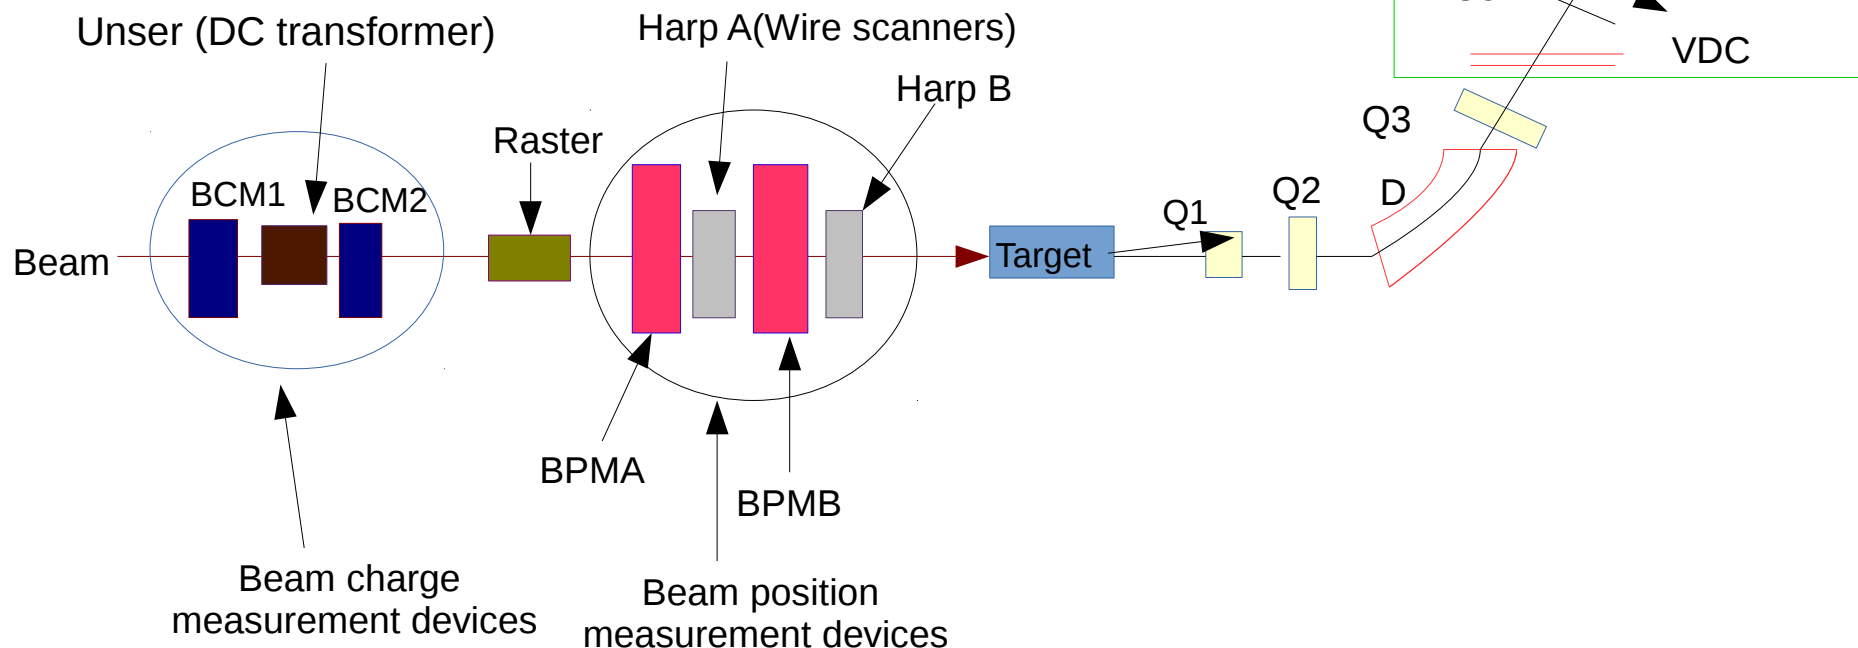

GMP calibration and systematic studies

- Calibration of beamline components
 - Beam position: BPMs and raster
 - Beam charge and current: Unser and BCMs
- Calibration of spectrometer optics
 - Multifoil carbon target with and without sieve slits
 - Spectrometer momentum (Delta scans)
- Beam energy measurements
- Target boiling studies
- Detector acceptance, efficiency and reconstruction analysis

GMp collected statistics

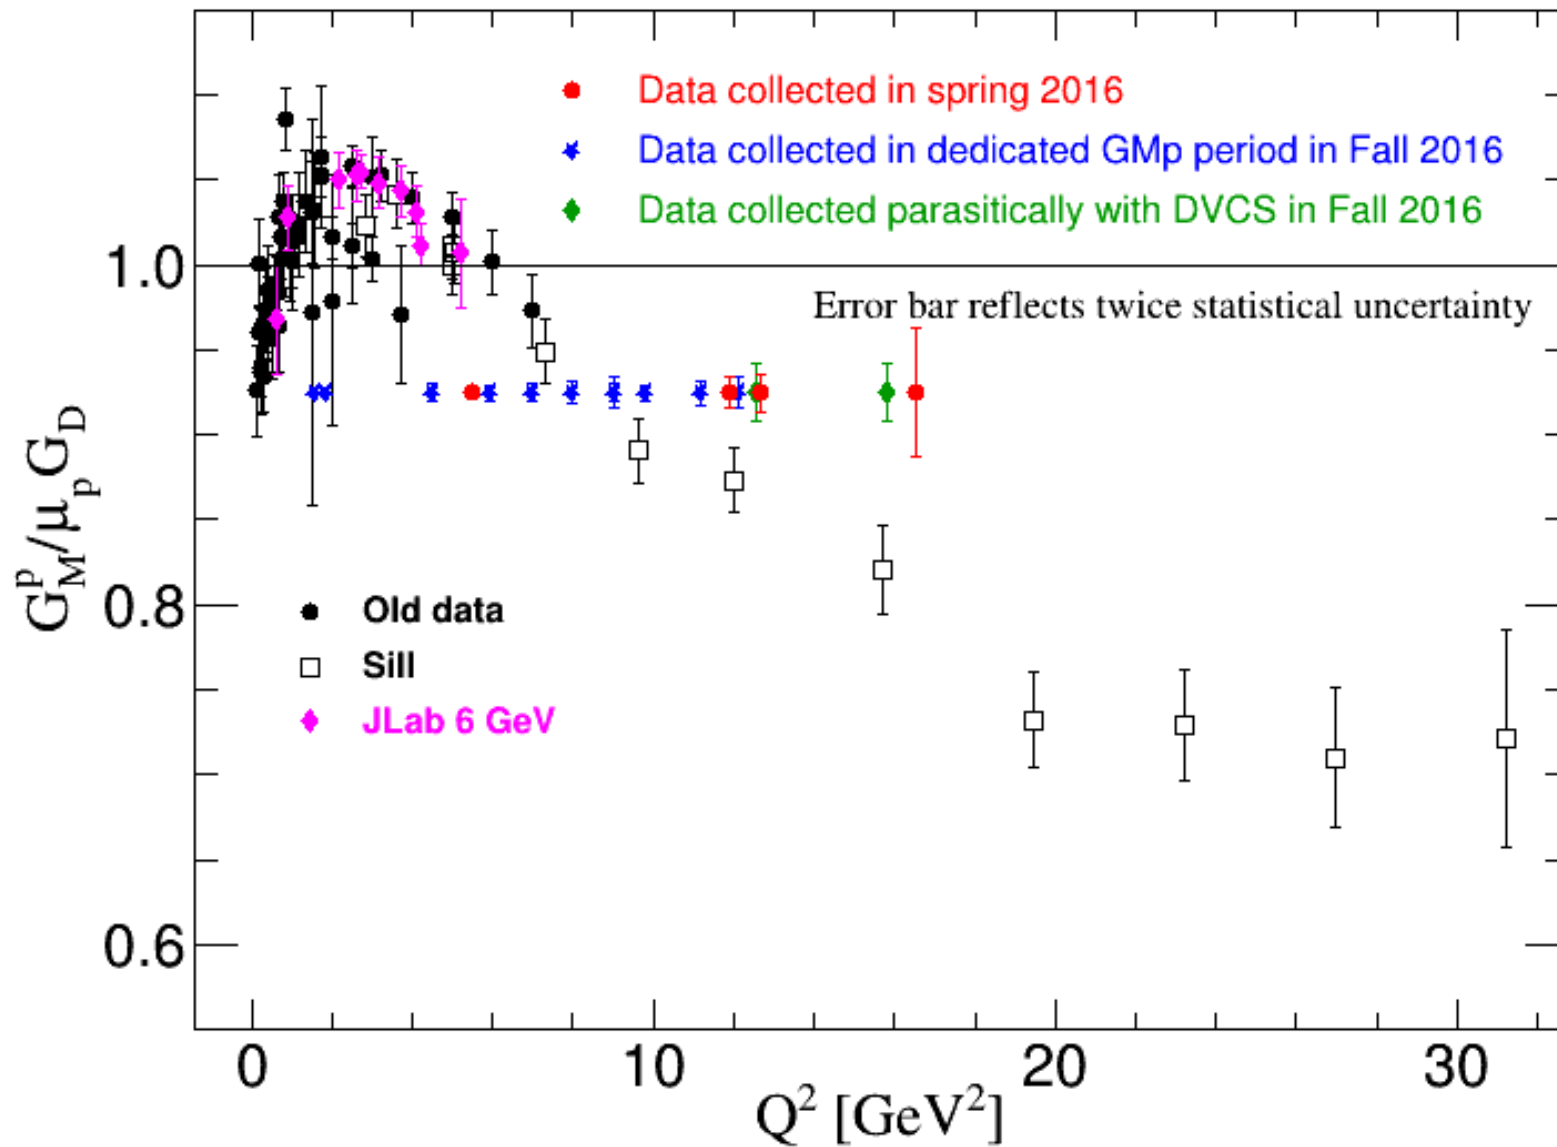

Summary of GMP collected data (I)

Spring 2015:

E_{beam} (GeV)	HRS	P_0 (GeV/c)	Θ_{HRS} (deg)	Q^2 (GeV/c) ²	Events(k)
2.06	R	1.15	48.7	1.65	157
2.06	L	1.22	45.0	1.51	386
2.06	L	1.44	35.0	1.1	396
2.06	L	1.67	25.0	0.66	405

Spring 2016:

E_{beam} (GeV)	HRS	P_0 (GeV/c)	Θ_{HRS} (deg)	Q^2 (GeV/c) ²	Events(k)
4.48	R	1.55	52.9	5.5	108
8.84	R	2.10	48.8	12.7	8
8.84	L	2.50	43.0	11.9	11
11.02	R	2.20	48.8	16.5	0.7







Summary of GMP collected data (II)

Fall 2016:

E_{beam} (GeV)	HRS	P_0 (GeV/c)	Θ_{HRS} (deg)	Q^2 (GeV/c) ²	Events(k)
2.22	R	1.23	48.8	1.86	356
2.22	L	1.37	42.0	1.57	2025
8.52	L	2.53	42.0	11.2	18.9
8.52	L	3.26	34.4	9.8	57.6
8.52	L	3.69	30.9	9.0	11.6
6.42	L	3.22	30.9	5.9	48.6
6.42	L	2.16	44.5	8.0	27.2
6.42	L	3.96	24.3	4.5	30.5
6.42	L	2.67	37.0	7.0	41.4
6.42	R	1.59	55.9	9.0	11.6
8.52	R	2.06	48.6	12.1	11
8.52	R	1.80	53.5	12.6	3.4
10.62	R	2.17	48.8	15.8	3.6

Beam position calibration





- BPMs are calibrated in Bull's eye scan runs against beam position from wire scanners
- The stability of average beam position was monitored at each kinematics

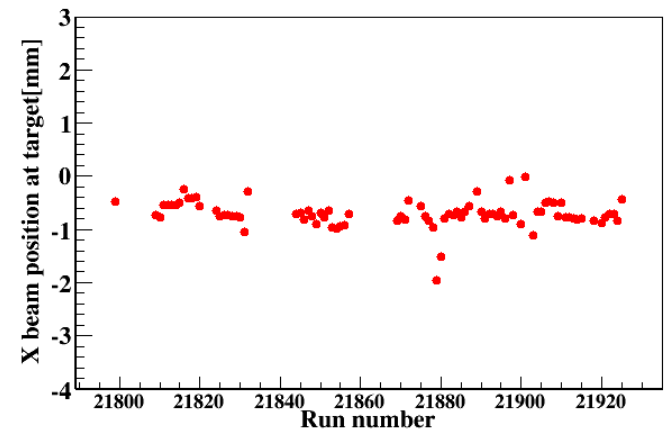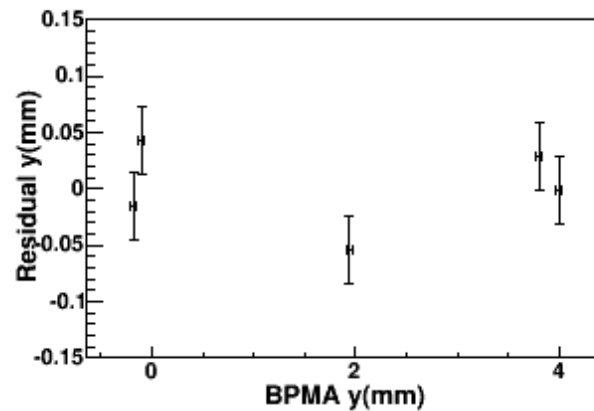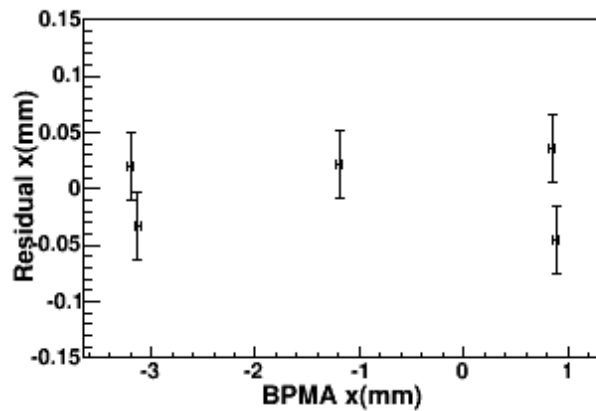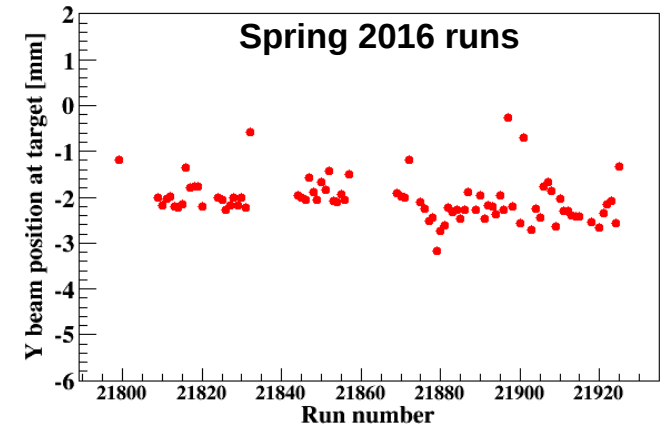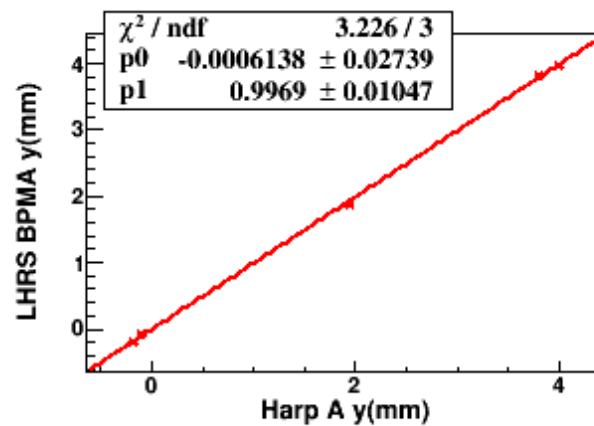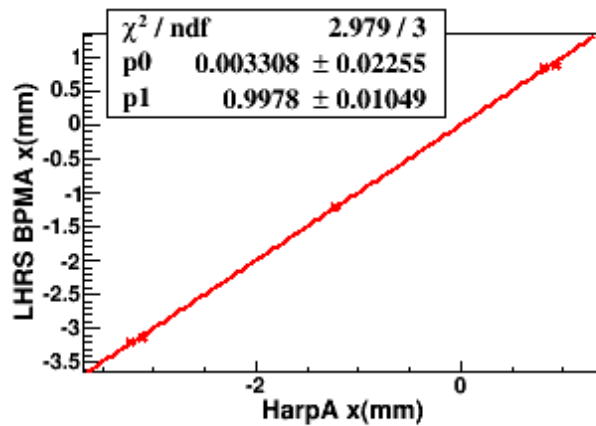




Beam charge calibration

- Multiple instruments of charge measurement: Unser and two BCMs
 - Two BCMs: Upstream and Downstream with multiple receiver per BCM
 - Old style (analog):
 - x1: u1 and d1
 - x3: d3
 - x10: d10
 - New style (digital): unew and dnew.
- Calibrated BCMs against unser up to 73 μA in Fall 2016
- Calibration coefficients from multiple measurement have negligible drift within uncertainties
- Beam current determination is much better than 1%
- **Estimated Current uncertainty in GMP experiment is $\sim 0.06 \mu\text{A}$**

Beam charge calibration

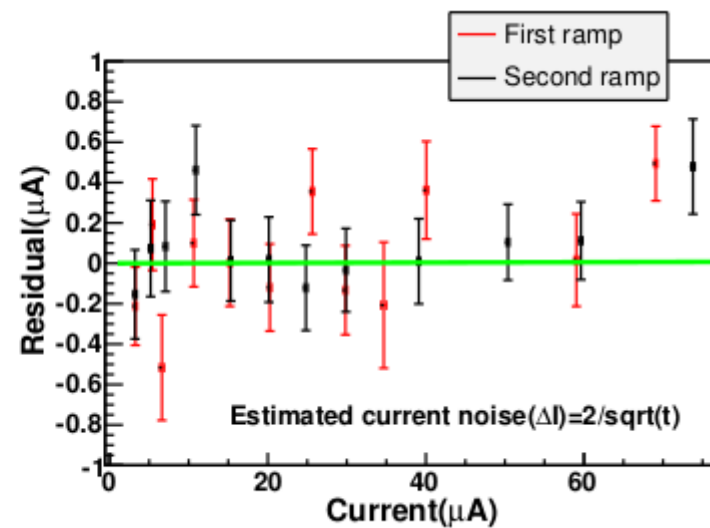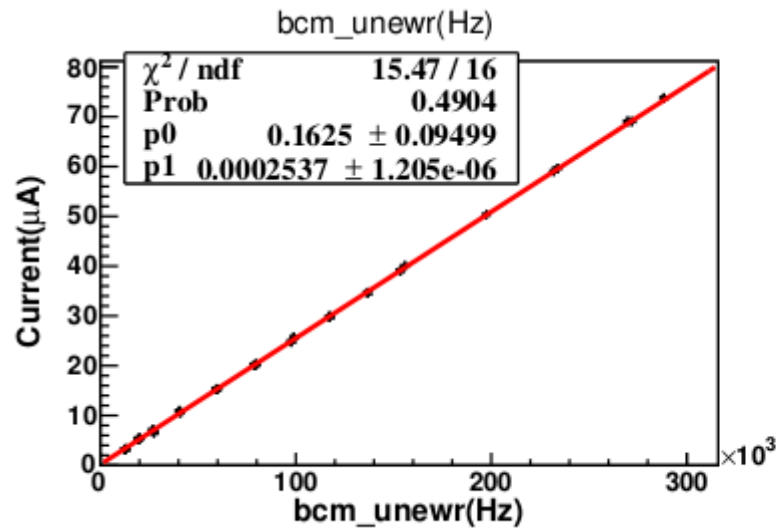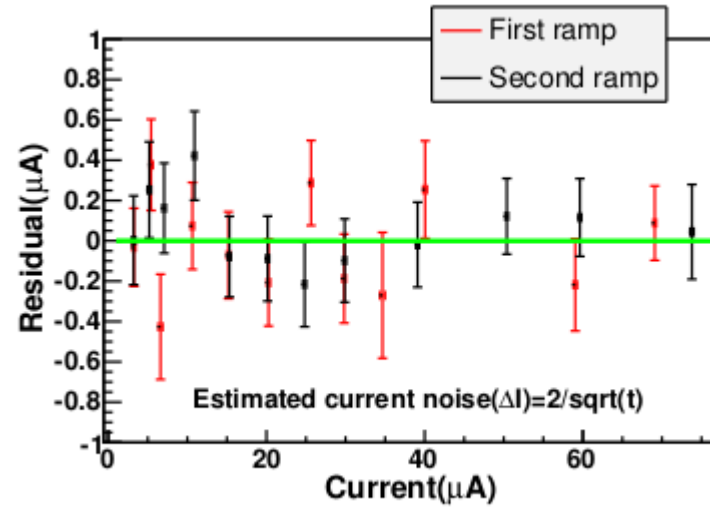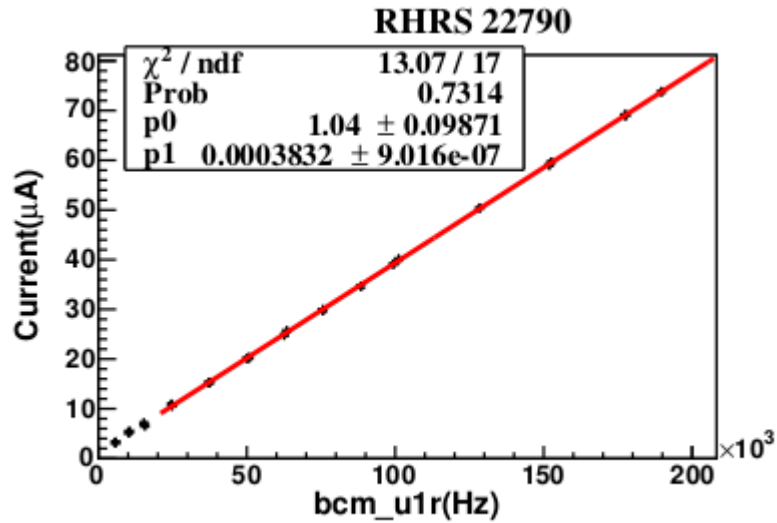


BCM global calibration

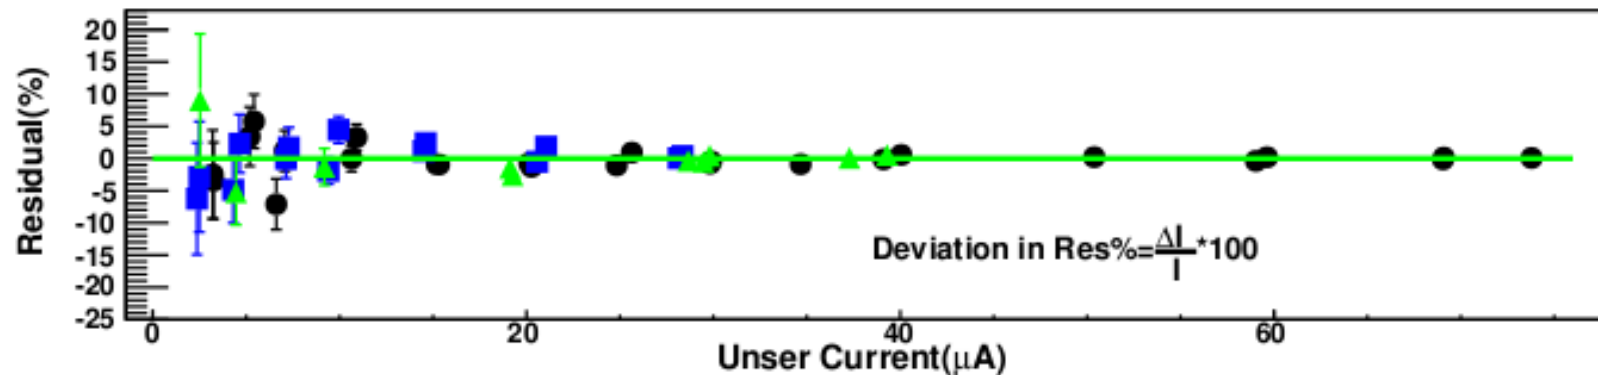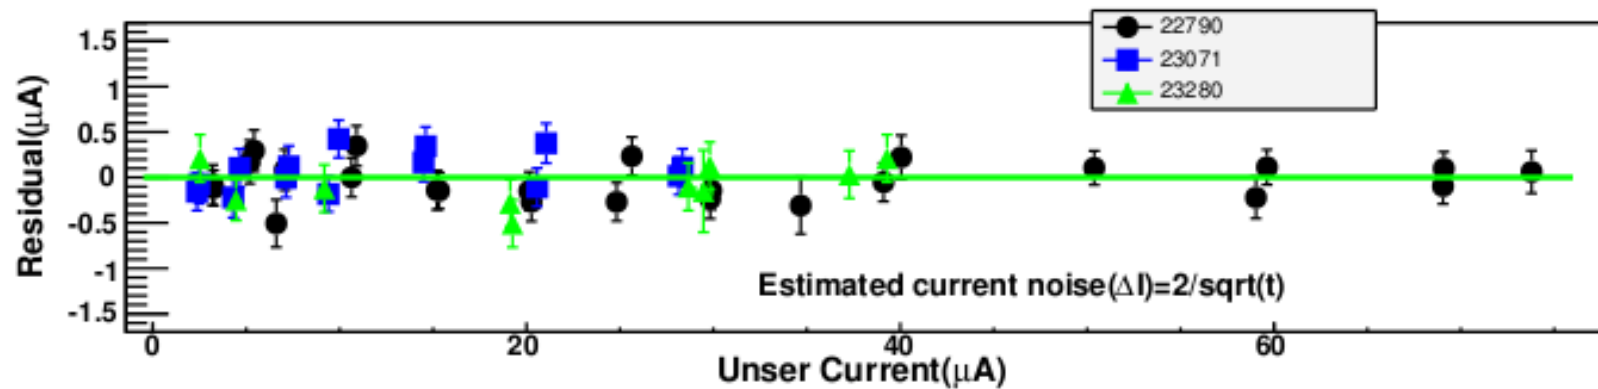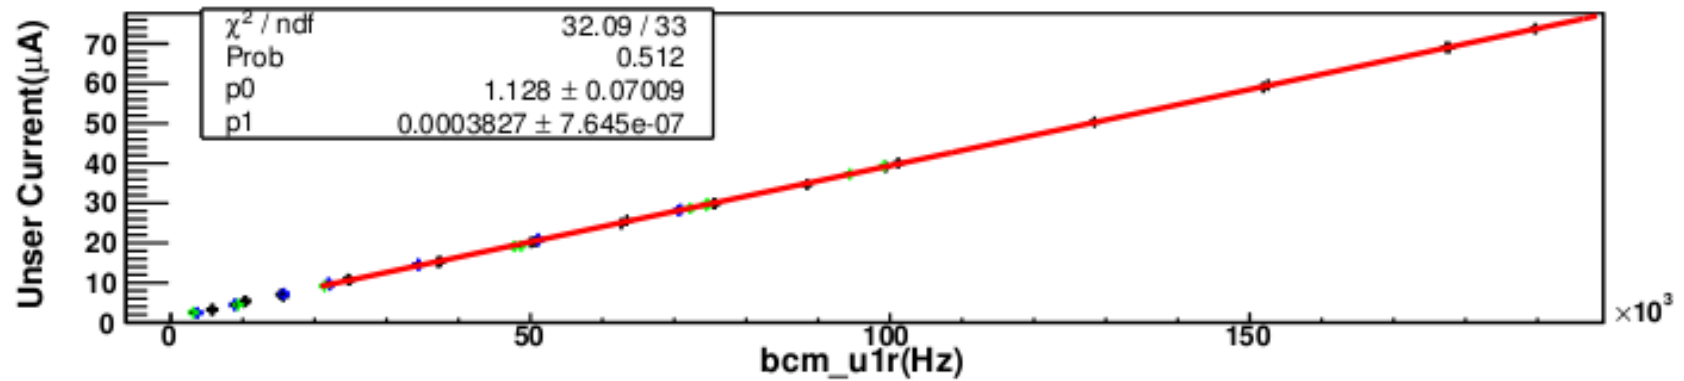

Target boiling studies

- Target used: 15 cm LH2 target in Loop2 and single foil carbon target
- Carbon target is used to separate possible rate systematic from boiling
 - Range of beam current: 3-67 μA
 - Raster size: $2 \times 2 \text{ mm}^2$

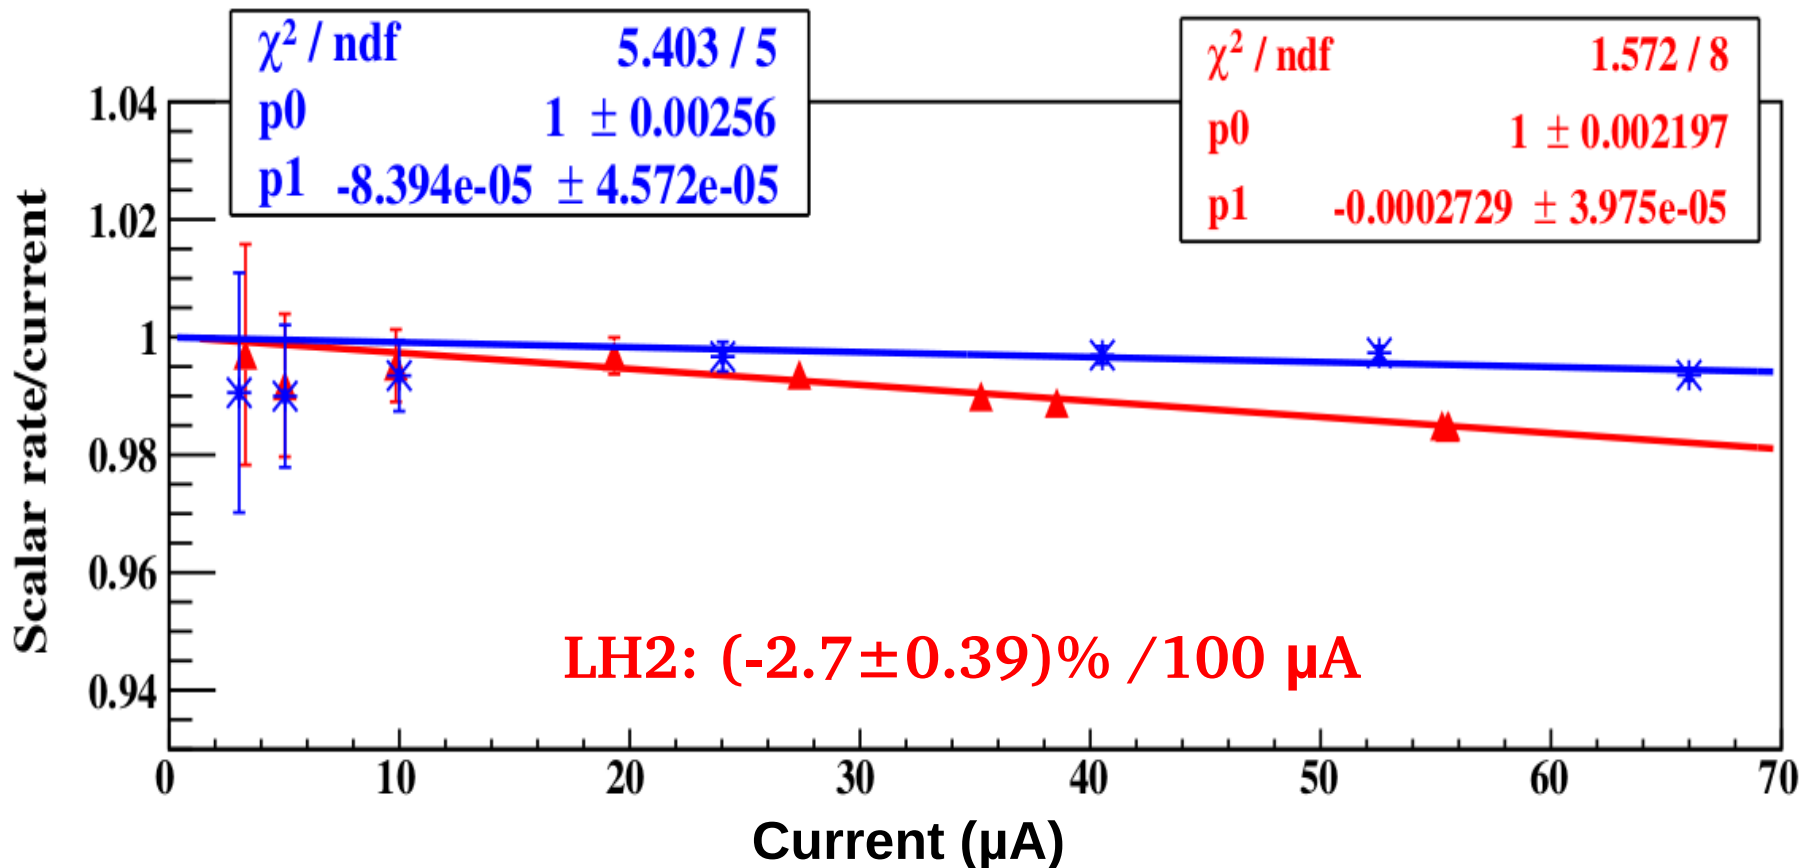


Precision calibration of optics for extended target

Angles (in-plane φ and out-of-plane θ) and vertex calibrations

- new sieve (hole density approximately double to traditional HRS sieve)
- 9 carbon foil targets


Delta calibration

- LH₂ target

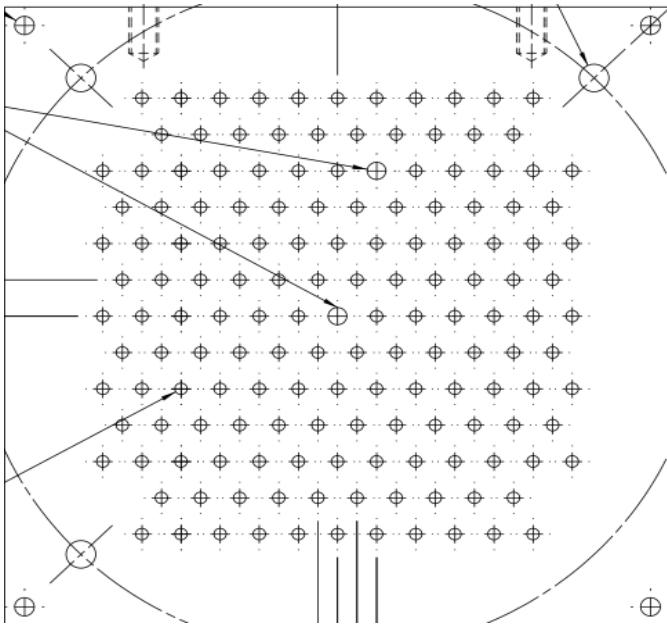

New sieve used for GMp optics


Sieve pattern of central carbon foil target

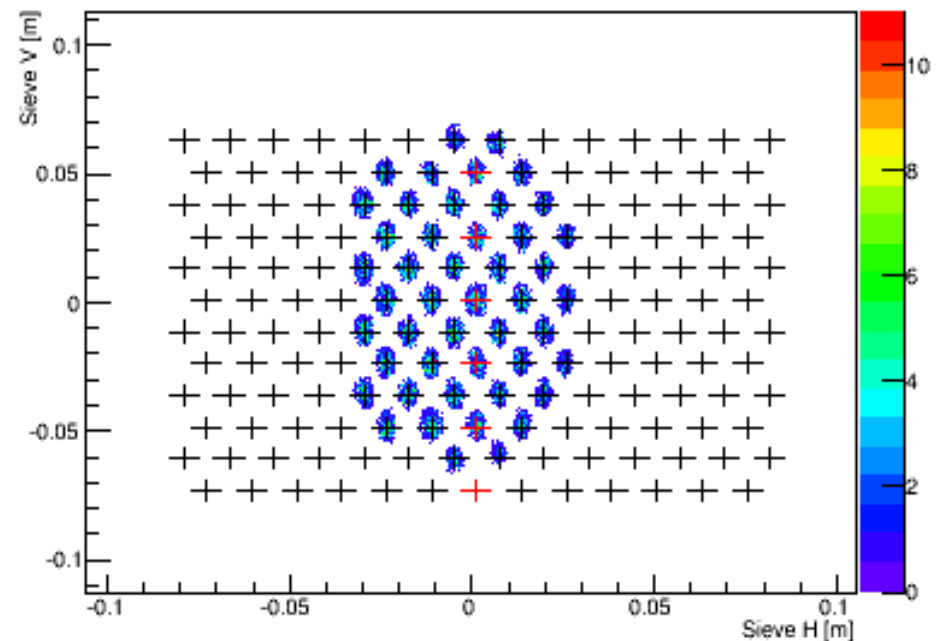

Crosses indicate the hole centers
Positions at the sieve plane are reconstructed by θ and φ

Reconstructed sieve pattern from multi-foil carbon targets


LHRS, $\theta_{\text{HRS}} = 42^\circ$

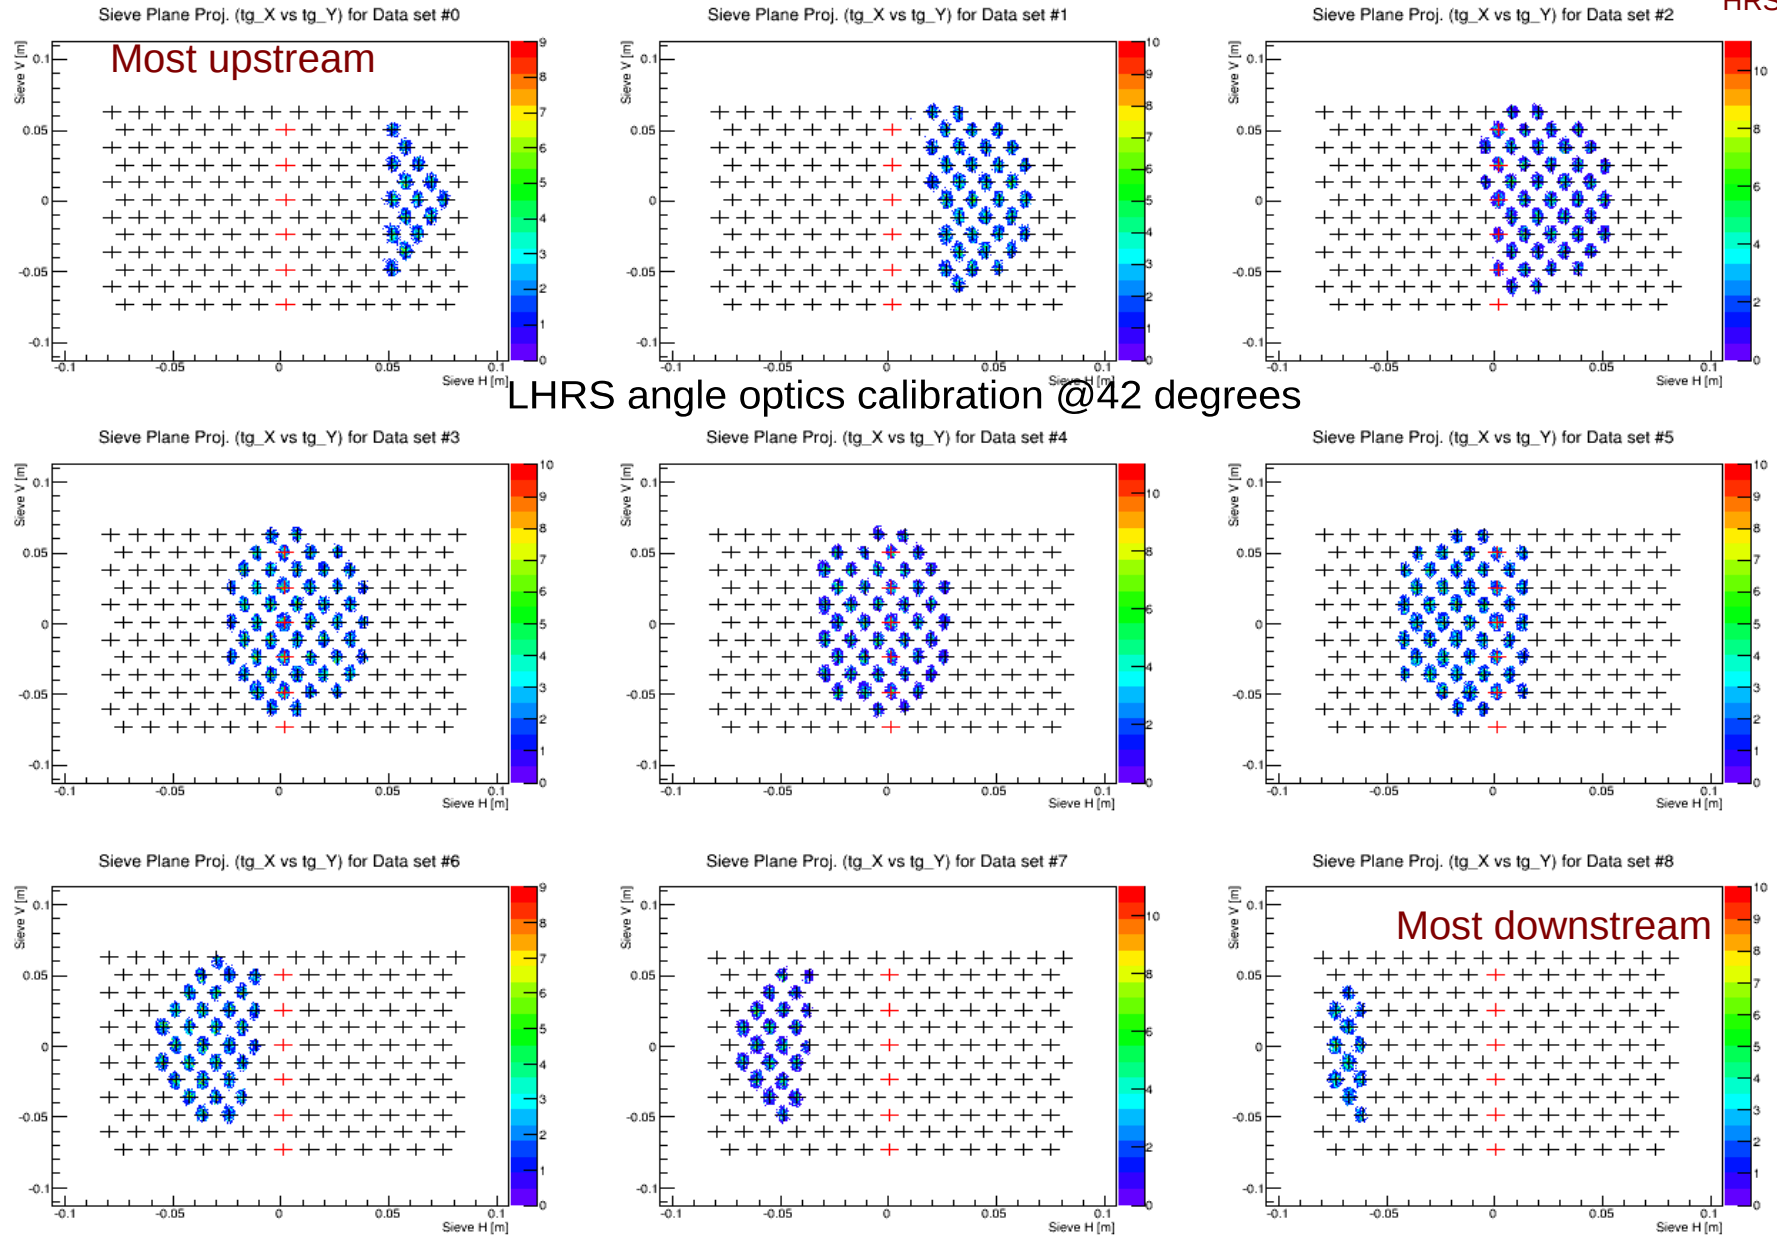



$\Delta\theta < 0.6 \text{ mrad}$, $\Delta\phi < 0.3 \text{ mrad}$

HRS vertex calibration

- Blue lines indicate the real foil target positions
- Δ shows the difference between the data gaussian fitting center and real position

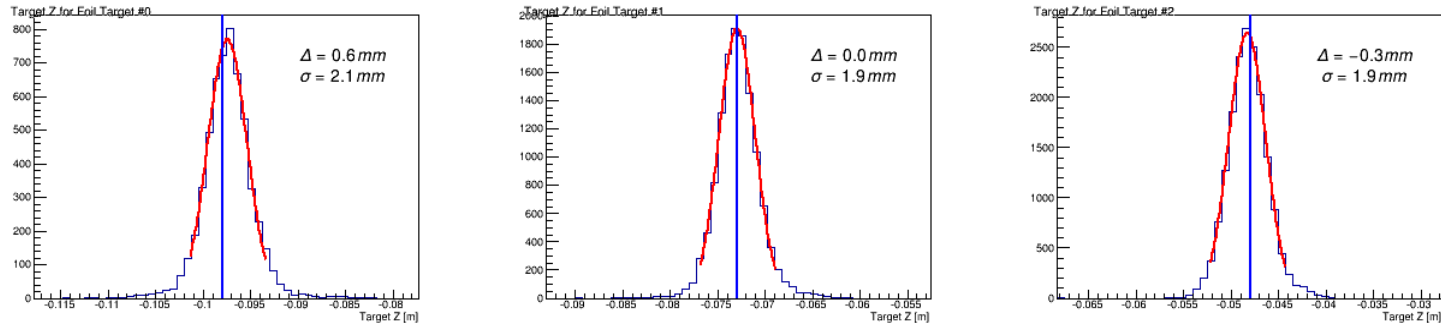

LHRS vertex optics calibration @42 degrees

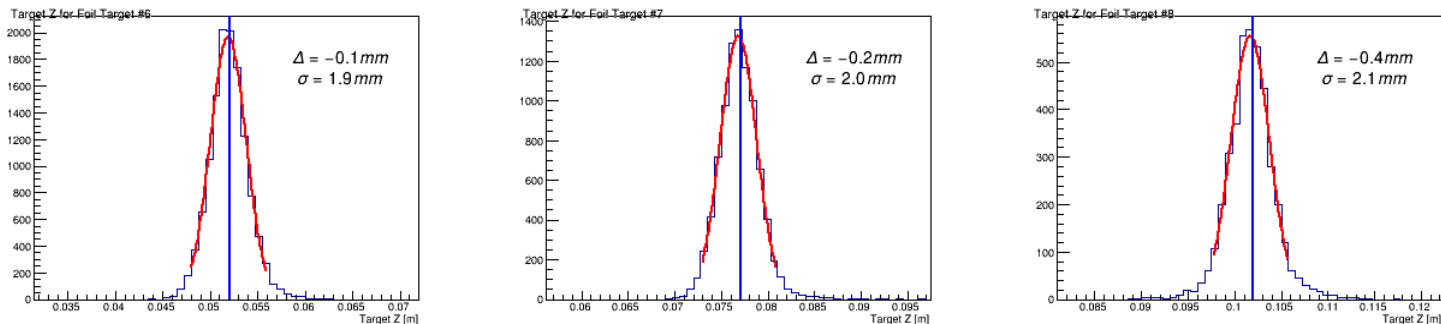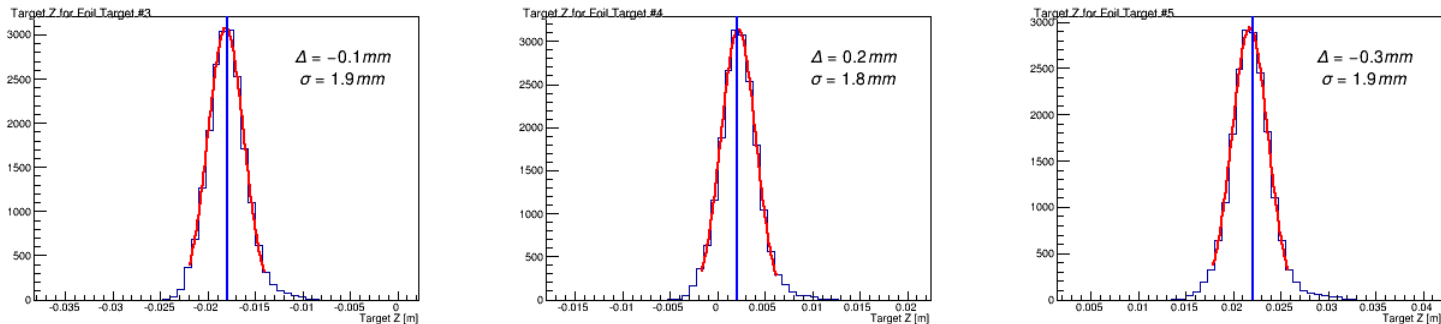


→ Target z (m)


HRS Momentum Calibration

- We took delta scans at $\pm 4\%$, $\pm 2\%$ and 0% dipole setting
- Clearly, the optimization readout is in the order of 10^{-4}


Dp_Kin for Delta Scan Kine. -4%

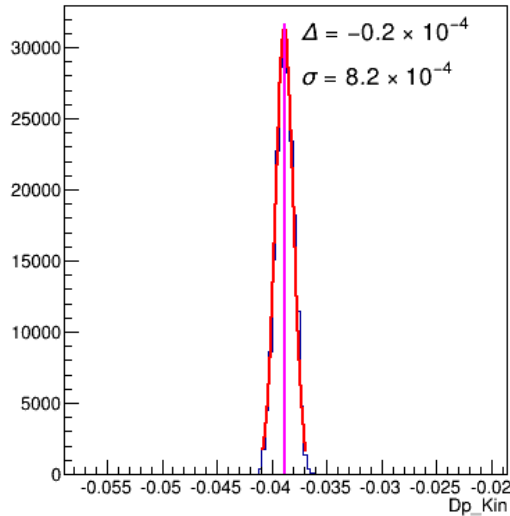


Dp_Kin for Delta Scan Kine. -2%

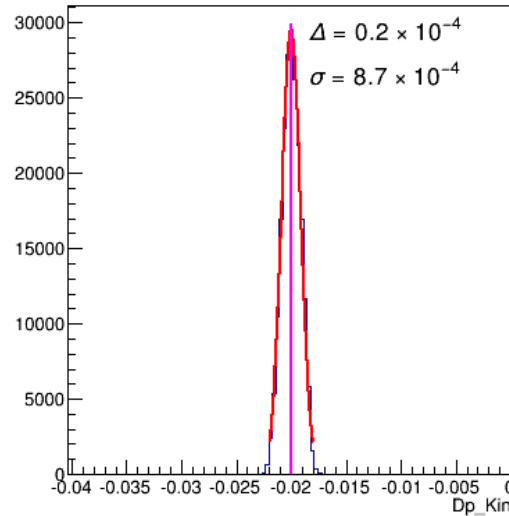


Dp_Kin for Delta Scan Kine. 0%

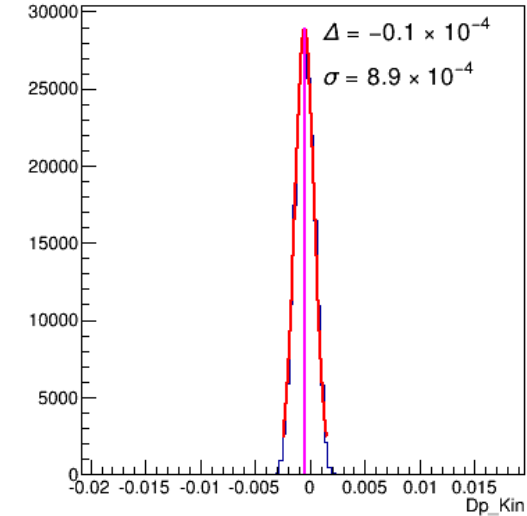

Dp_Kin for Delta Scan Kine. 2%

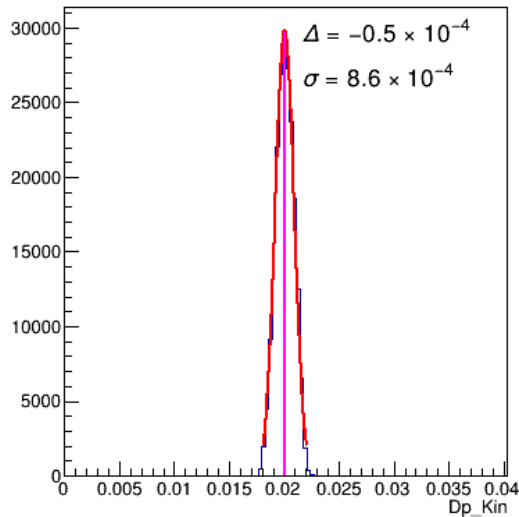

Dp_Kin for Delta Scan Kine. 4%

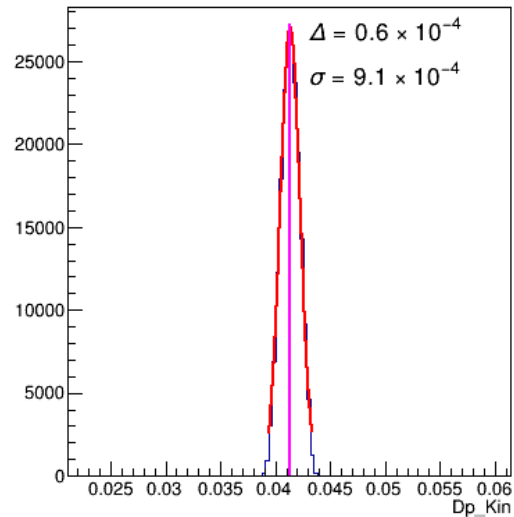


$$\text{DpKin}_{\text{Real}} = \frac{P_{\theta_{\text{HRS}}} - P_{\text{Central}}}{P_{\text{Central}}}$$

$$\text{DpKin} = dp - \frac{(P_{\theta} - P_{\text{Loss}}) - P_{\theta_{\text{HRS}}}}{P_{\text{Central}}}$$

$$\text{DpKin} - \text{DpKin}_{\text{Real}} = dp - \frac{(P_{\theta} - P_{\text{Loss}}) - P_{\text{Central}}}{P_{\text{Central}}}$$





Reconstructed invariant mass

- This plot is from a one pass run on the Left HRS during Fall 2016 after optics calibration
- Clearly, the raster and ionization energy loss correction shifted the invariant mass peak by ~ 1.5 MeV from proton mass

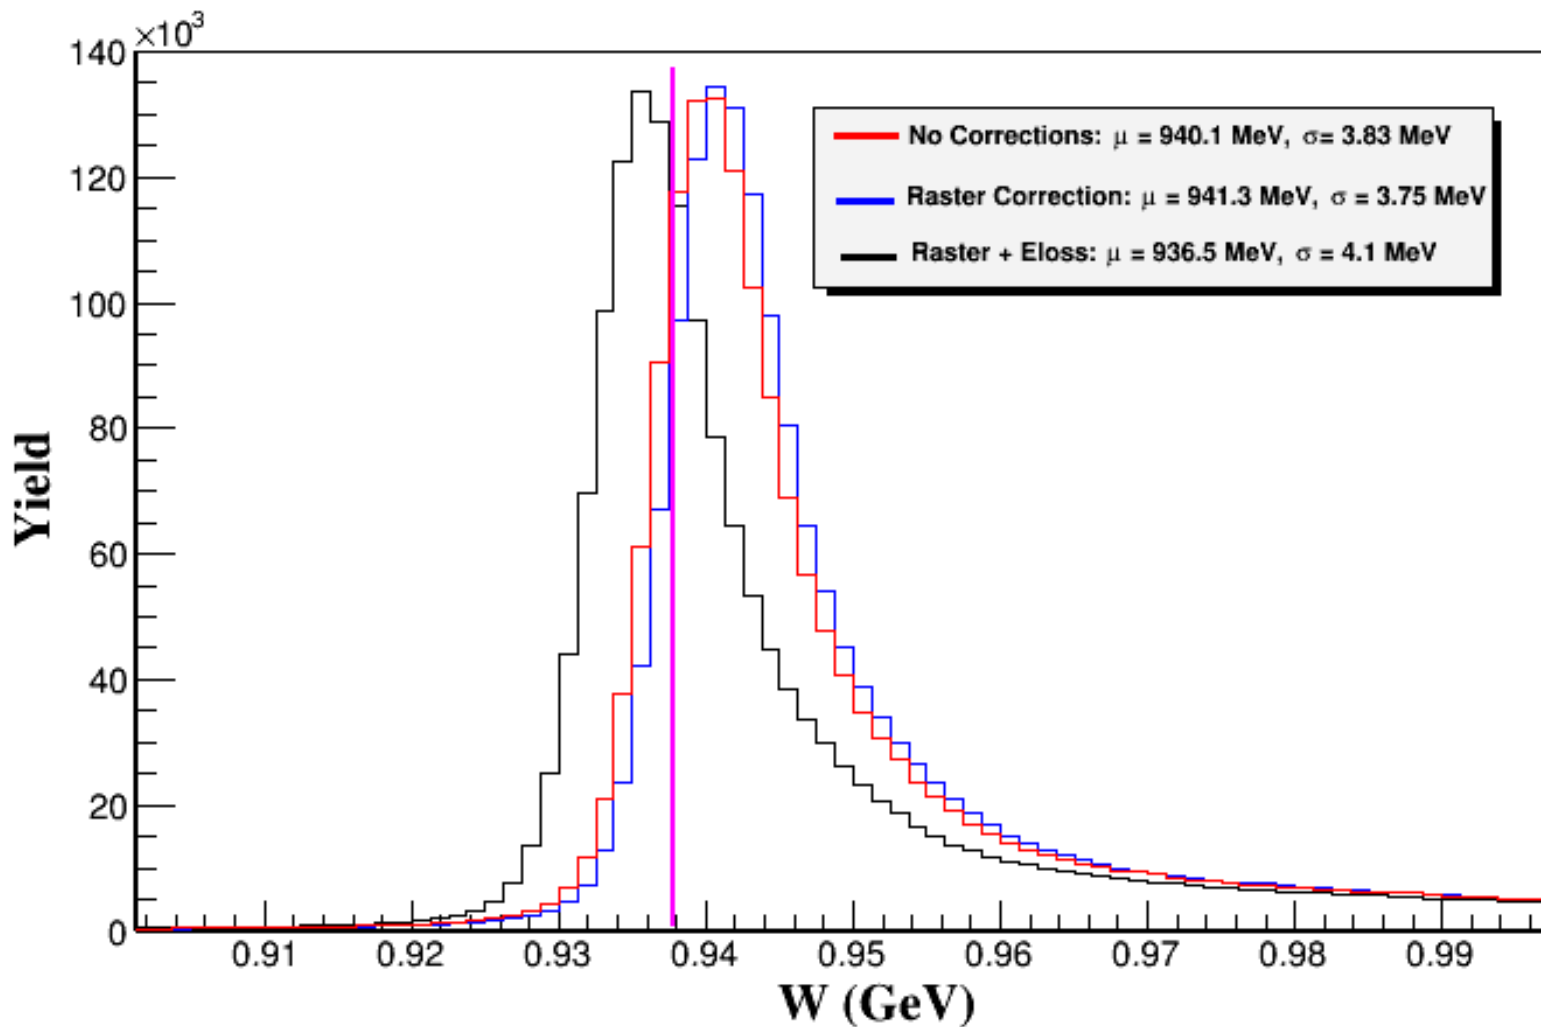


Particle identification analysis

- We did particle identification studies using Cherenkov and calorimeter
- Got preliminary PID efficiency at one pass and the cuts were set to select good electrons

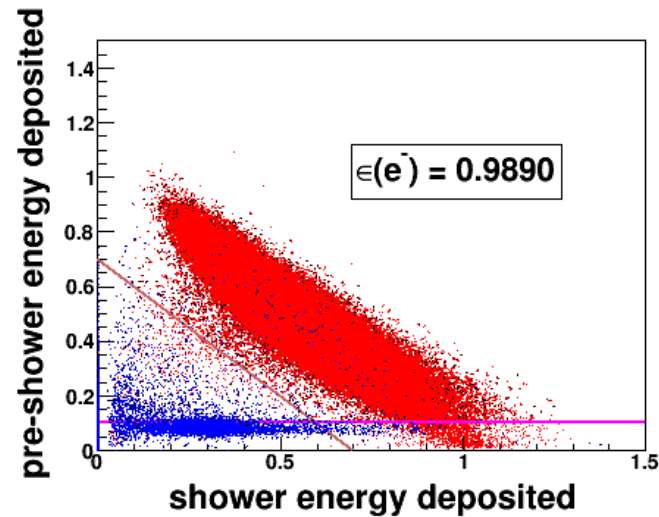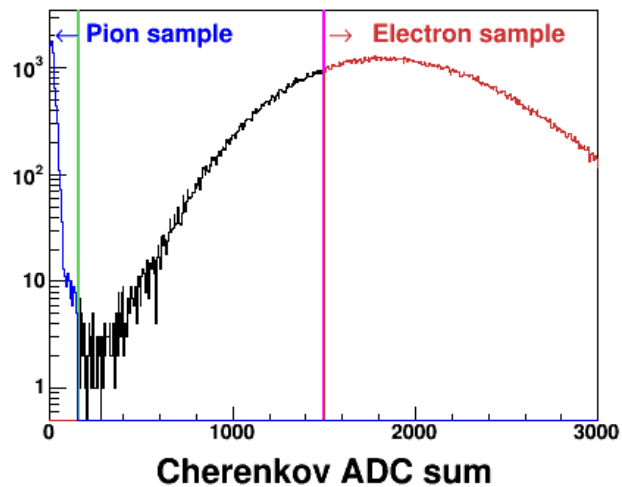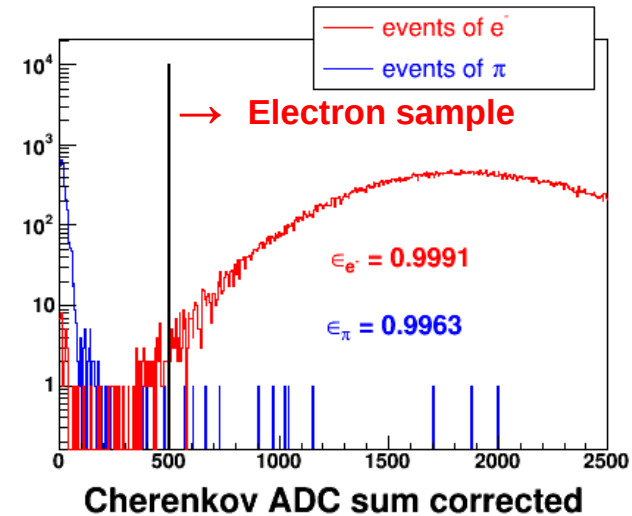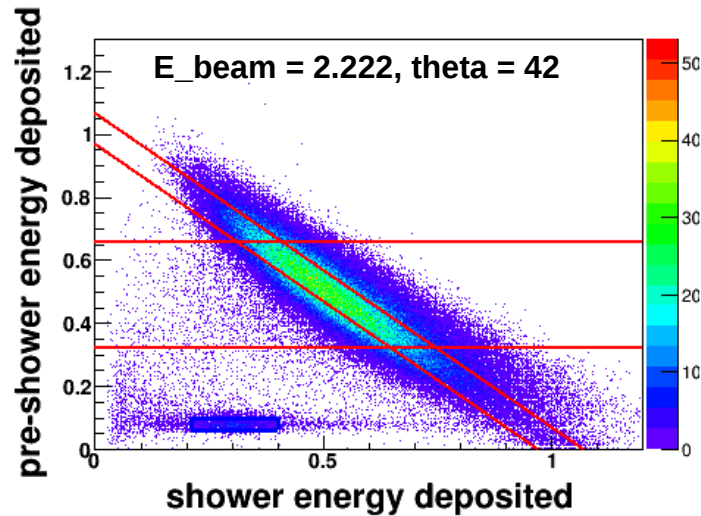

Status of acceptance study


- Took data on single foil carbon target to study the acceptance of the spectrometer
- Used single arm simulation which gives an uniformly distributed phase space for carbon target without physics weighting
- Used external code to get physics weighting which is the ratio of born cross section to radiative correction yield factor

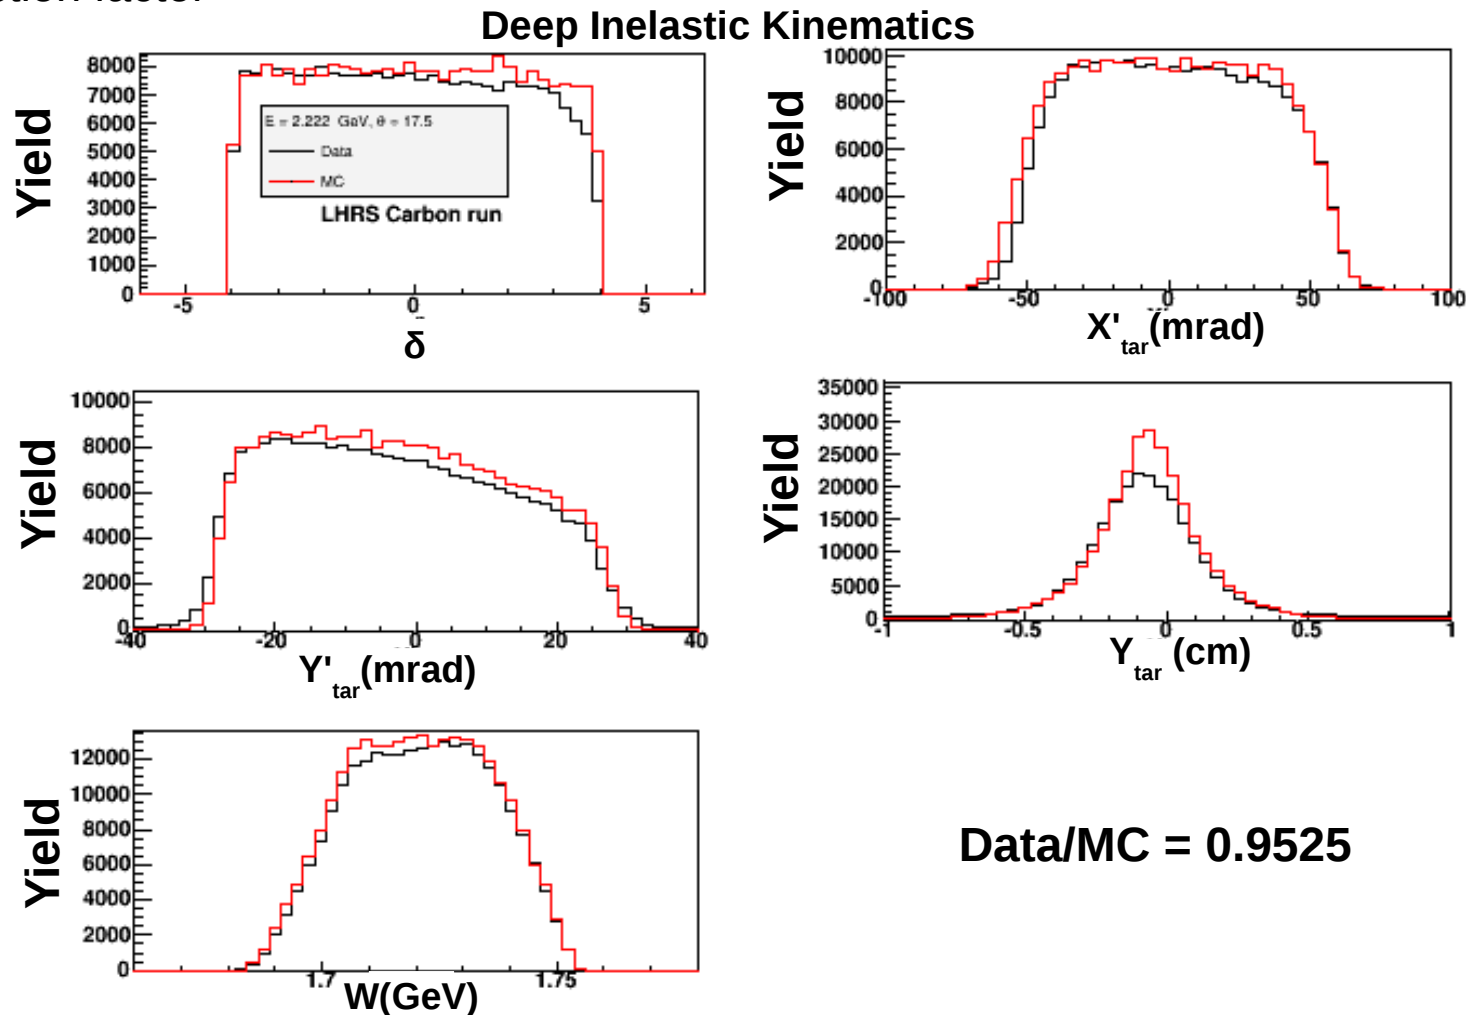

Status of acceptance study


- Shapes are consistent at very different kinematics
- The discrepancy observed in high delta probably comes from spectrometer model

Quasi elastic Kinematics

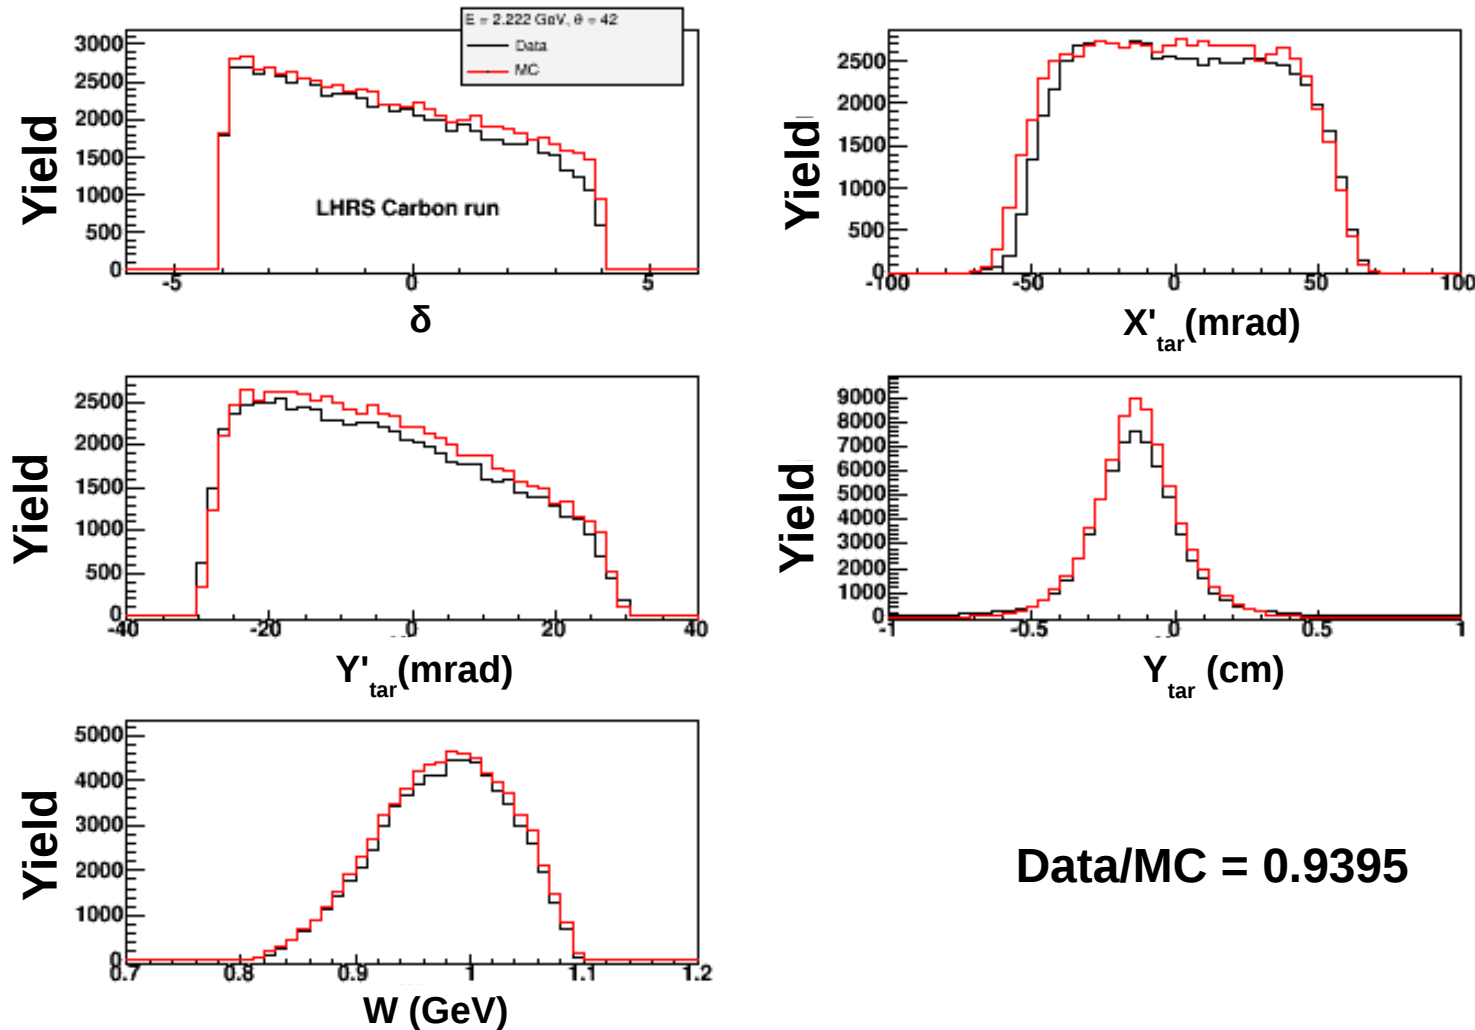

Data to SIMC comparison at 1pass LH2

- SIMC uses same model of spectrometer as single arm but includes all radiative contribution within the code
- Data and SIMC distribution integrals are reasonably consistent
- Improvement of spectrometer model is ongoing

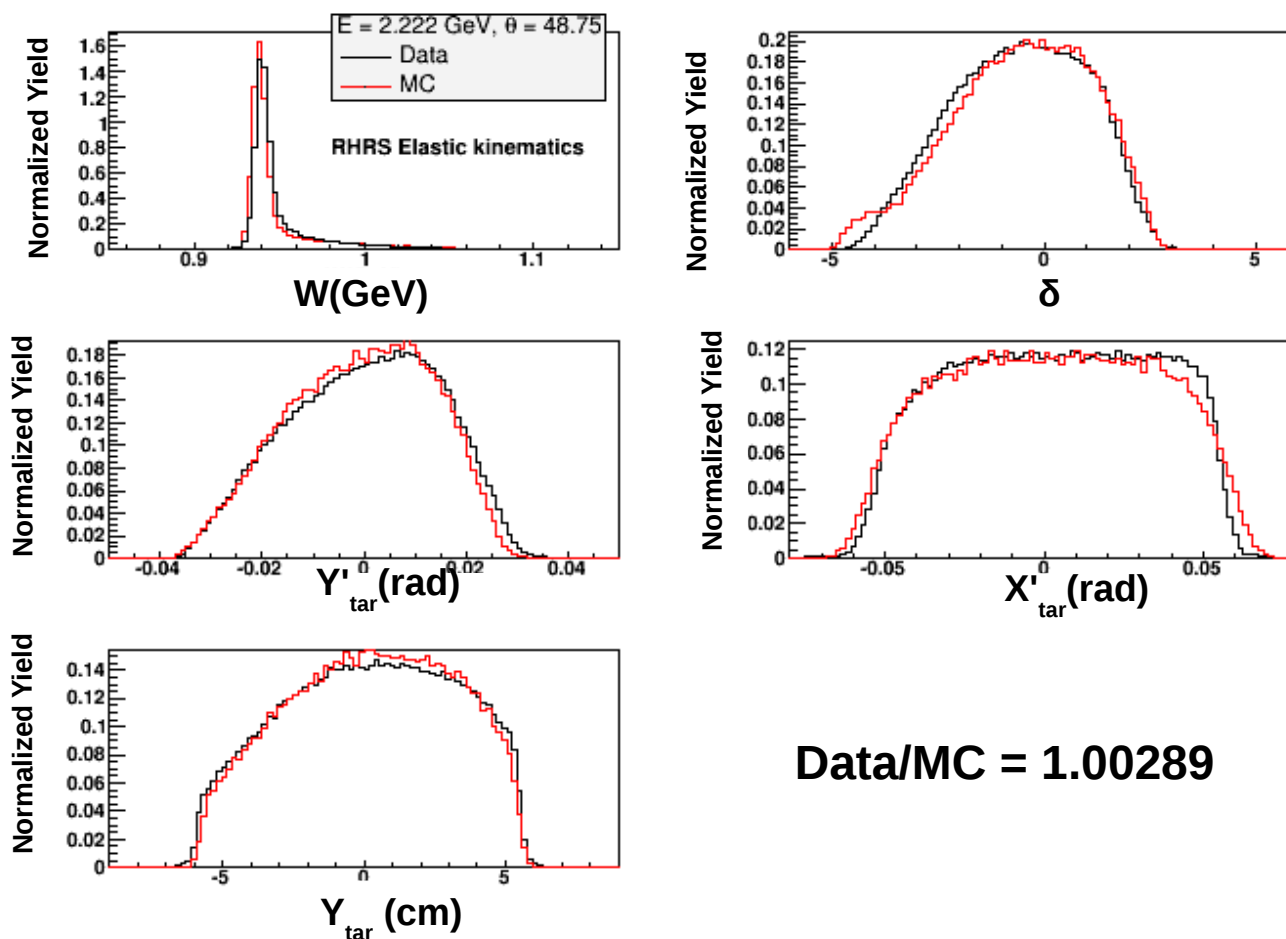

Punch list

<u>System calibration</u>	<u>Status</u>
BCM	Completed for first pass analysis
BPM	80% completed
Raster	Completed for first pass analysis
Optics	Completed for first pass analysis
Cerenkov	Completed for first pass analysis
Calorimeter	Completed for first pass analysis
VDC/Straw	75% completed
Detector Position Study	Completed for first pass analysis

<u>Data analysis</u>	<u>Status</u>
Acceptance	60% completed
Tracking efficiency	60% completed
Trigger efficiency	50% completed
Particle identification	70% completed
Time of flight	80% completed
DAQ dead time	40% completed
Data analysis at First pass	70% completed

Summary

- 12 GeV GMp experiment data taking completed successfully
- Equipment operated stably and satisfactorily
- First pass data replay is close to completion
- Projected milestones:
 - Preliminary cross-section results in four months
 - First publication to be submitted by the end of 2017

Thank you everybody!

Reduction of track reconstruction systematics

- The standard tracking system of two VDCs in HRS cannot resolve u-v matching ambiguities when multiple clusters are presented, resulting in increased probability of mis-reconstructed events
- Straw chamber was installed as a third readout plane to reduce systematics of track reconstruction efficiency
- Potential tracks formed by matching VDC clusters are projected and compared with hit position in the straw chamber plane
- This procedure was tested with 2 pass beam and improved the track reconstruction efficiency to 98%

